

AI 2,5 -18 GY


Order No.: 3200072

The figure shows the version AI 0,75-10 GY

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=3200072>

Ferrule, Sleeve length: 18 mm, Length: 24 mm, Color: gray

Commercial data

EAN	 4 017918 093723
sales group	B250
Pack	100 Pcs.
Customs tariff	85369010
Gross weight in pieces	0.000256 KG
Net weight per piece	0.000256 KG
Catalog page information	Page 446 (C-5-2013)

Product notes

WEEE/RoHS-compliant since:
01/01/2005

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions

Length (b)	24 mm
Maximum stripping length	21 mm
Sleeve length	18 mm
Inner dimension of the insulating collar (d)	4.2 mm
Ferrule diameter	2.3 mm
Insulating collar thickness	0.3 mm
Sleeve wall thickness	0.15 mm

Ambient conditions

Short-term temperature	120 °C
Max. permanent temperature	105 °C

General

Color	gray
Components	free from silicone and halogen
Inflammability class according to UL 94	HB
Material	E-CU

Certificates / Approvals




Certification cCSAus

Certifications applied for:

Certification Ex:

Drawings

Dimensioned drawing

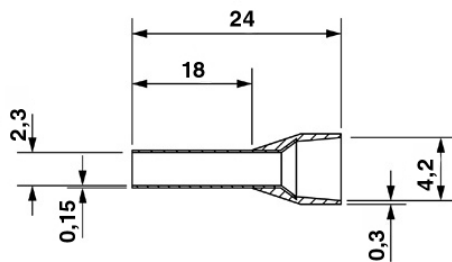

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;