

## AI-XL 10 -12 RD


Order No.: 3201958

The illustration shows a version of the product

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=3201958>

Ferrule, Sleeve length: 12 mm, Length: 24 mm, Color: red

### Commercial data

EAN	 4 017918 117405
sales group	B256
Pack	100 Pcs.
Customs tariff	85369010
Gross weight in pieces	0.00063 KG
Net weight per piece	0.00063 KG
Catalog page information	Page 449 (C-5-2013)

### Product notes

WEEE/RoHS-compliant since:  
03/03/2005

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Dimensions

Length (b)	24 mm
Maximum stripping length	18 mm
Sleeve length	12 mm
Inner dimension of the insulating collar (d)	10.2 mm
Ferrule diameter	4.6 mm
Insulating collar thickness	0.3 mm
Sleeve wall thickness	0.2 mm

**Ambient conditions**

Short-term temperature	120 °C
Max. permanent temperature	105 °C

**General**

Color	red
Components	free from silicone and halogen
Inflammability class according to UL 94	HB
Material	E-CU

**Certificates / Approvals**




Certification cCSAus

Certifications applied for:

Certification Ex:

**Drawings**

Dimensioned drawing

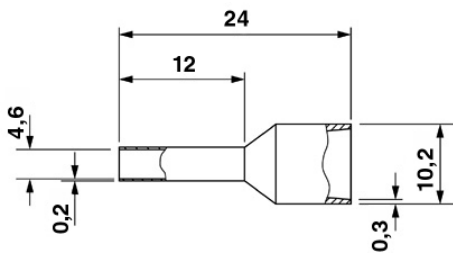

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact  
Technical modifications reserved;