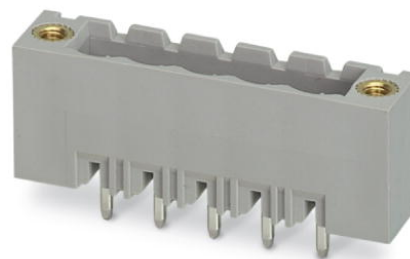


BCH-508VF-14 GY


Order No.: 5434243

The figure shows a 5-pos. version of the product

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=5434243>

Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 14, Pitch: 5.08 mm, Color: signal grey, Contact surface: Tin, Assembly: Soldering

Commercial data

EAN	 4 046356 171441
Note	Made-to-order
sales group	E611
Pack	100 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.00753 KG
Net weight per piece	0.00753 KG

Product notes

WEEE/RoHS-compliant since:
02/21/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data


Dimensions

Length	8.6 mm
Pitch	5.08 mm
Dimension a	66.04 mm
Pin dimensions	1 x 1 mm
Hole diameter	1.4 mm

General

Range of articles	BCH-VF
Insulating material group	I
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/3)	250 V
Rated voltage (III/2)	320 V
Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current I _N	12 A
Maximum load current	12 A
Insulating material	PA
Inflammability class according to UL 94	V0
Color	signal grey
Number of positions	14

Certificates / Approvals



Certification cULus Recognized

Certifications applied for:

Certification Ex:

Accessories

Item	Designation	Description
------	-------------	-------------

Assembly


1755477	MSTB-BL	Keying cap, for forming sections, plugs onto header pin, green insulating material
---------	---------	--

Marking


0804183	SK 5/3,8:FORTL.ZAHLEN	Marker cards, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - (99)100, Mounting type: Adhesive, for terminal block width: 5 mm, Lettering field: 5 x 3.8 mm
0803906	SK U/3,8 WH:UNBEDRUCKT	Marker cards, Sheet, white, unlabeled, can be labeled with: Plotter, Office printing systems, Mounting type: Adhesive, Lettering field: 186 x 3.8 mm

Drawings

Drilling plan/solder pad geometry

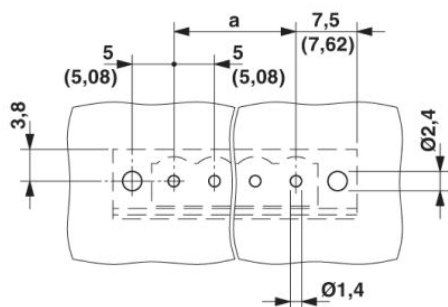

Dimensioned drawing

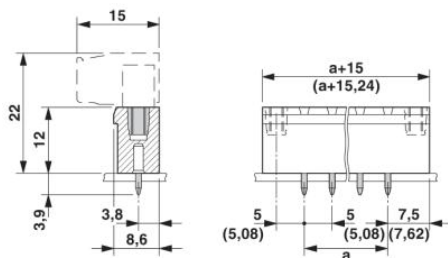

BCH-508VF-14 GY Order No.: 5434243

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=5434243>

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;