

## IC-DFR 9

Order No.: 1852095



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1852095>

Accessories, Number of positions: 9, Pitch: 5.08 mm, Color: green,  
This assembly frame can only be used in combination with IC 2,5/...-  
STGF-5,08

### Commercial data

|                          |                                                                                                        |
|--------------------------|--------------------------------------------------------------------------------------------------------|
| EAN                      | <br>4 017918 108977 |
| sales group              | E190                                                                                                   |
| Pack                     | 50 Pcs.                                                                                                |
| Customs tariff           | 39269097                                                                                               |
| Gross weight in pieces   | 0.002598 KG                                                                                            |
| Net weight per piece     | 0.002598 KG                                                                                            |
| Catalog page information | Page 350 (C-1-2013)                                                                                    |

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Dimensions

|             |          |
|-------------|----------|
| Pitch       | 5.08 mm  |
| Dimension a | 40.64 mm |

#### General

|                   |        |
|-------------------|--------|
| Range of articles | IC-DFR |
|-------------------|--------|

|                                         |                     |
|-----------------------------------------|---------------------|
| Insulating material group               | I                   |
| Nominal cross section                   | 2.5 mm <sup>2</sup> |
| Insulating material                     | PA                  |
| Inflammability class according to UL 94 | V0                  |
| Number of positions                     | 9                   |

### Certificates / Approvals

Certification

Certifications applied for:

Certification Ex:

### Accessories

| Item | Designation | Description |
|------|-------------|-------------|
|------|-------------|-------------|

#### Assembly


|         |             |                                                                                                                     |
|---------|-------------|---------------------------------------------------------------------------------------------------------------------|
| 0708263 | DFK-MSTB-SS | Screw set, for securing the header to the device wall, consists of an M3 x 10 screw, with a spring washer and a nut |
|---------|-------------|---------------------------------------------------------------------------------------------------------------------|

#### General

|         |                     |                                                                                                                                                                                      |
|---------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1825572 | IC 2,5/ 9-STGF-5,08 | Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 9, Pitch: 5.08 mm, Connection method: Screw connection, Color: green, Contact surface: Tin |
|---------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Drawings


Drilling plan/solder pad geometry

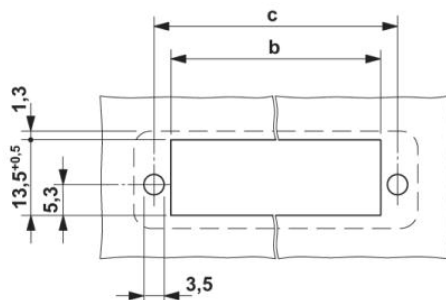

Dimension b: 10.84 mm + (no. of pos. x 5.08 mm)  
 Dimension c: Dim. b + 5.83 mm

Dimensioned drawing

---

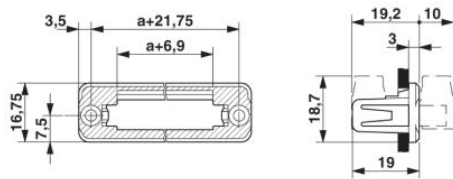

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact  
Technical modifications reserved;