

SACC-M12FS-12SOL-PG 9-M

Order No.: 1404420

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1404420>

Connector, Universal, 12-position, Socket straight M12, A-coded,
Solder connection, Knurl material: Zinc die-cast, nickel-plated, Cable
gland Pg9, External cable diameter 6 mm ... 8 mm

Commercial data

EAN	4 046356 694520
sales group	D122
Pack	1 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.0249 KG
Net weight per piece	0.02222 KG
Catalog page information	Page 19 (C-4-2013)

Product notes

WEEE/RoHS-compliant since:
09/06/2011



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data**Dimensions**

External diameter	6 mm ... 8 mm
-------------------	---------------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C (Plug / socket)
Degree of protection	IP67

General

Rated current at 40°C	1 A
Rated voltage	30 V
Number of positions	12
Contact resistance	≤ 3 mΩ
Insulation resistance	> 10 GΩ
Coding	A - standard
Standards/regulations	M12 connector IEC 61076-2-101
Signal type/category	Universal
Status display	No
Surge voltage category	II
Pollution degree	3
Connection method	Solder connection
Conductor cross section	0.08 mm² ... 0.25 mm²
AWG conductor cross section	30 ... 24
Insertion/withdrawal cycles	≥ 100
Torque	0.4 Nm (M12 knurl)

Material

Contact material	CuSn
Contact surface material	Au
Contact carrier material	PA
Material of grip body	PA
Material, knurls	Zinc die-cast, nickel-plated

Certificates / Approvals


Certification

Certifications applied for:

Certification Ex:


Drawings

Dimensioned drawing

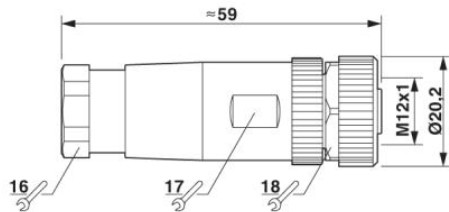

M12 x 1 socket, straight

Schematic diagram

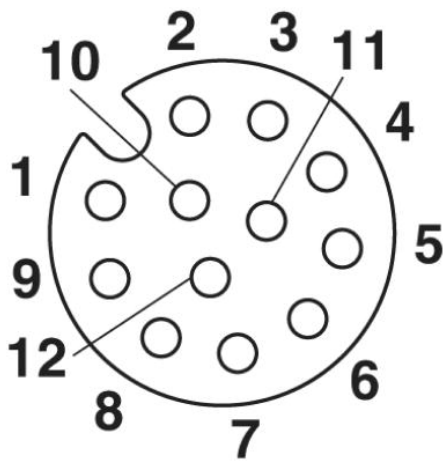

Pin assignment M12 socket, 12-pos., A-coded, view female side

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;