


# CRIMPFOX-DSUB 5

Order No.: 1212111

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1212111>

Crimping pliers for D-SUB contacts, high-density and standard, 0.08 - 0.5 mm<sup>2</sup>, B-crimp, incl. contact locator



Commercial data	
EAN	 4 046356 453899
sales group	C105
Pack	1 Pcs.
Customs tariff	82032000
Gross weight in pieces	0.4429 KG
Net weight per piece	0.09999 KG
Catalog page information	Page 409 (C-5-2013)

**Product notes**

WEEE/RoHS-compliant since:  
09/25/2008



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>Dimensions</b>	
Length (b)	198 mm
Height	59 mm
Width (a)	18 mm

**General**

Color	black
Compression	B crimp
Type of contact	D-SUB (standard and high-density)
Designation	Crimping position 1
Min. cross section	0.08 mm <sup>2</sup>
Max. cross section	0.22 mm <sup>2</sup>
AWG min	28
AWG max	26
Designation	Crimping position 2
Min. cross section	0.08 mm <sup>2</sup>
Max. cross section	0.22 mm <sup>2</sup>
AWG min	28
AWG max	26
Designation	Crimping position 3
Min. cross section	0.22 mm <sup>2</sup>
Max. cross section	0.5 mm <sup>2</sup>
AWG min	26
AWG max	22
Die station	Crimping position 4
	Crimping position 5

**Certificates / Approvals**



Certification GOST

Certifications applied for:

Certification Ex:


**Accessories**

Item	Designation	Description
<b>Tools</b>		
1212287	CRIMPFOX-DSUB 5/DIE	Spare die for CRIMPFOX-DSUB 5
1212036	CRIMPFOX/ SPR-3	Spare recuperating spring

**Drawings**

Product drawing

---

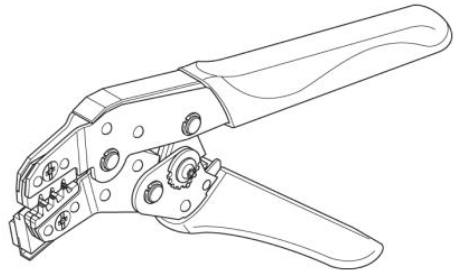

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact  
Technical modifications reserved;