


CRIMPFOX-RC 2,5

Order No.: 1212063

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1212063>Crimping pliers, for uninsulated cable lugs, 0.34 - 2.5 mm², indent
crimp

Commercial data	
EAN	 4 046356 453844
sales group	C101
Pack	1 Pcs.
Customs tariff	82032000
Gross weight in pieces	0.4353 KG
Net weight per piece	0.4353 KG
Catalog page information	Page 400 (C-5-2013)

Product notesWEEE/RoHS-compliant since:
09/25/2008

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Dimensions**

Length (b)	198 mm
Height	59 mm
Width (a)	18 mm

General

Compression	Indent crimp
Type of contact	Non-insulated cable lugs
Designation	Crimping position 1
Min. cross section	0.34 mm ²
Max. cross section	0.75 mm ²
AWG min	22
AWG max	20
Designation	Crimping position 2
Min. cross section	0.75 mm ²
Max. cross section	1.5 mm ²
AWG min	14
AWG max	16
Designation	Crimping position 3
Min. cross section	1.5 mm ²
Max. cross section	2.5 mm ²
AWG min	16
AWG max	14
Die station	Crimping position 4
	Crimping position 5

Certificates / Approvals



Certification GOST

Certifications applied for:

Certification Ex:

Accessories

Item	Designation	Description
------	-------------	-------------


Tools

1212064	CRIMPFOX-RC 2,5/DIE	Spare die for CRIMPFOX-RC 2,5
---------	---------------------	-------------------------------

1212036	CRIMPFOX/ SPR-3	Spare recuperating spring
---------	-----------------	---------------------------

Drawings

Product drawing

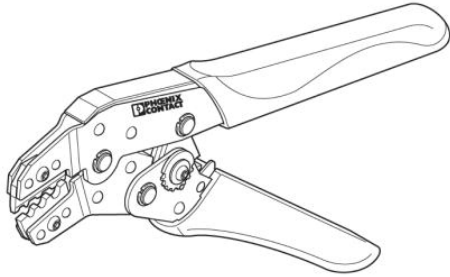

CRIMPFOX-RC 2,5 Order No.: 1212063

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1212063>

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;