


**VS-09-ST-DSUB-CD-B**

Order No.: 1688858

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1688858>

D-SUB contact carrier, shell size 1, for nine signal contacts, contact type pin, for crimp contacts, straight, fixing with 3 mm hole, for panel mounting frame and sleeve housing VS-09-...

Commercial data	
EAN	 4 017918 822989
sales group	D501
Pack	10 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.00486 KG
Net weight per piece	0.00458 KG
Catalog page information	Page 212 (C-2-2013)

## Product notes

WEEE/RoHS-compliant since:  
03/01/2005

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>Mechanical characteristics</b>	
Number of positions	9
Connection profile	D-SUB 9
Insertion/withdrawal cycles	≥ 500
Connection method	Crimp connection

#### Ambient conditions

Ambient temperature (operation)	-55 °C ... 125 °C
---------------------------------	-------------------

#### Material data

Inflammability class according to UL 94	V0
Housing material	Steel, yellow chromated
Contact carrier material	Polyester GF

#### Electrical characteristics

Rated voltage (III/3)	125 V
Rated surge voltage	1 kV
Rated current	5 A

#### Certificates / Approvals



Certification GOST

Certifications applied for:

Certification Ex:

#### Accessories

Item	Designation	Description
------	-------------	-------------


#### Contacts

1688971	VS-ST-CD-1,0/14,8/0,2	Crimp contact, for D-SUB contact inserts with standard contact density, pin, connection cross section AWG 28 ... 24, turned, gold-plated
1688968	VS-ST-CD-1,0/14,8/0,5	Crimp contact, for D-SUB contact inserts with standard contact density, pin, connection cross section AWG 24 ... 20, turned, gold-plated

## Drawings

### Dimensioned drawing

D-SUB contact carrier

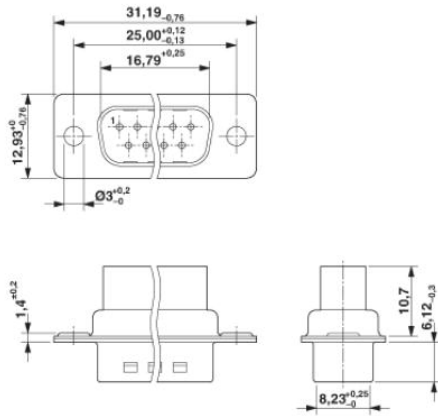

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact  
Technical modifications reserved;