


VS-15-BU-DSUB-CD-OG

Order No.: 1688942

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1688942>

D-SUB contact carrier, shell size 2, for 15 signal contacts, contact type socket, for crimp contacts, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-...

Commercial data

EAN	 4 017918 823092
sales group	D501
Pack	10 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.00651 KG
Net weight per piece	0.00651 KG
Catalog page information	Page 212 (C-2-2013)

Product notesWEEE/RoHS-compliant since:
03/01/2005

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Number of positions	15
Connection profile	D-SUB 15
Insertion/withdrawal cycles	≥ 500
Connection method	Crimp connection

Ambient conditions

Ambient temperature (operation)	-55 °C ... 125 °C
---------------------------------	-------------------

Material data

Inflammability class according to UL 94	V0
Housing material	Steel, yellow chromated
Contact carrier material	Polyester GF

Electrical characteristics

Rated voltage (III/3)	125 V
Rated surge voltage	1 kV
Rated current	5 A

Certificates / Approvals



Certification GOST

Certifications applied for:

Certification Ex:


Accessories

Item	Designation	Description
Contacts		
1688997	VS-BU-CD-1,0/14,4/0,2	Crimp contact, for D-SUB contact inserts with standard contact density, socket, connection cross section AWG 28 ... 24, turned, gold-plated
1688984	VS-BU-CD-1,0/14,4/0,5	Crimp contact, for D-SUB contact inserts with standard contact density, socket, connection cross section AWG 24 ... 20, turned, gold-plated

Drawings

Dimensioned drawing

D-SUB contact carrier

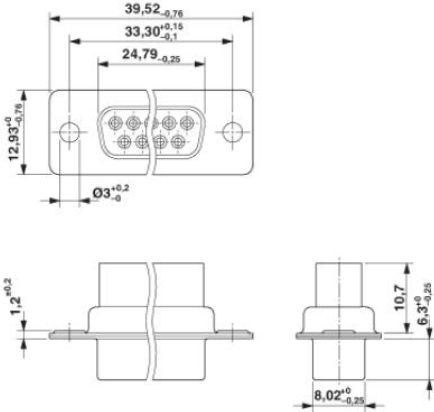

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;