


VS-25-A

Order No.: 1689750

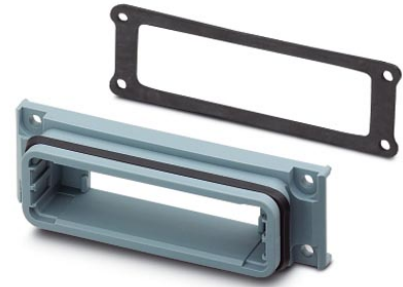

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1689750>

D-SUB panel mounting frame, shell size 3, IP67 degree of protection

Commercial data

EAN	 4 017918 922009
sales group	D500
Pack	5 Pcs.
Customs tariff	85389099
Gross weight in pieces	0.0117 KG
Net weight per piece	0.01153 KG
Catalog page information	Page 220 (C-2-2013)

Product notes

WEEE/RoHS-compliant since:
04/05/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions

Height	16.8 mm
--------	---------

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 80 °C

General

Type	D-SUB 25
Degree of protection	IP67

Inflammability class according to UL 94	V0
Housing material	PA
Seal material	Flat gasket: NBR; profile gasket: EPDM
Ambient temperature (operation)	-40 °C ... 80 °C

Certificates / Approvals

Certification

Certifications applied for:


Certification Ex:

Accessories


Item	Designation	Description
General		
1689763	VS-25-A-EMV-S	D-SUB EMC shroud, shell size 3, for panel mounting frame VS-25-...
Protective covers		
1652211	VS-25-SD	D-SUB protective cover, shell size 3, IP54 degree of protection, for panel mounting frame and sleeve housing VS-25-...

Drawings

Dimensioned drawing

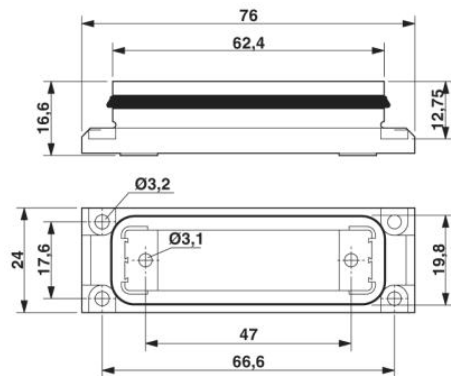

D-SUB panel mounting frame

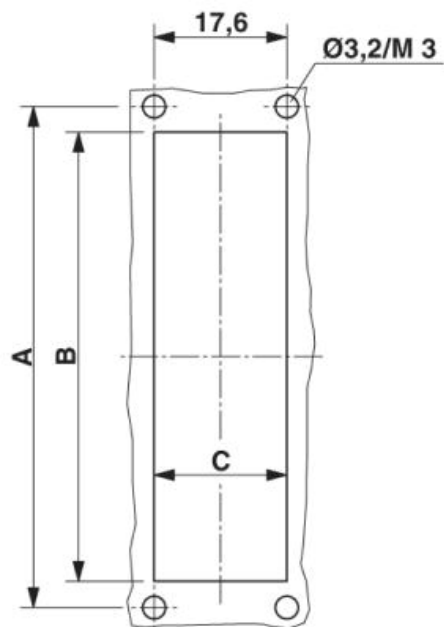

Panel cutout: VS-25-A...

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;