

C-RC 120/M10 DIN

Order No.: 3240125



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=3240125>

Ring cable lug, non-insulated, 120 mm², M10

Commercial data

EAN	 4 046356 453424
Note	Made-to-order
sales group	B282
Pack	25 Pcs.
Customs tariff	85369010
Gross weight in pieces	0.058388 KG
Net weight per piece	0.028194 KG
Catalog page information	Page 455 (C-5-2013)

Product notes

WEEE/RoHS-compliant since:
09/24/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions

Length (b)	56 mm
Width (a)	24 mm
Length of insulation sleeve (c)	22 mm
Inner dimension of the insulating collar (d)	16.5 mm
Distance between the center and the insulation sleeve (e)	22 mm
Inner diameter (f)	10.5 mm
Material thickness (g)	3 mm

Ambient conditions

Ambient temperature (operation)	110 °C
---------------------------------	--------

General

Color	silver
Stripping length	25 mm
Material	Copper

Certificates / Approvals


Certification

Certifications applied for:

Certification Ex:

Drawings

Dimensioned drawing

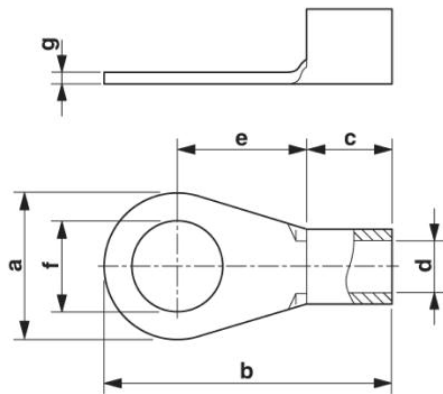

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;