

C-RC 6/M8 DIN

Order No.: 3240086



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=3240086>

Ring cable lug, non-insulated, 2.6 - 6 mm², M8

Commercial data

EAN	4 046356 453035
sales group	B282
Pack	50 Pcs.
Customs tariff	85369010
Gross weight in pieces	0.002088 KG
Net weight per piece	0.002088 KG
Catalog page information	Page 454 (C-5-2013)

Product notes

WEEE/RoHS-compliant since:
09/23/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions

Length (b)	26 mm
Width (a)	14 mm
Length of insulation sleeve (c)	6 mm
Inner dimension of the insulating collar (d)	3.6 mm
Distance between the center and the insulation sleeve (e)	13 mm
Inner diameter (f)	8.4 mm

Material thickness (g)	1 mm
------------------------	------

Ambient conditions

Ambient temperature (operation)	110 °C
---------------------------------	--------

General

Color	silver
Stripping length	9 mm
Material	Copper

Certificates / Approvals


Certification

Certifications applied for:

Certification Ex:

Drawings

Dimensioned drawing

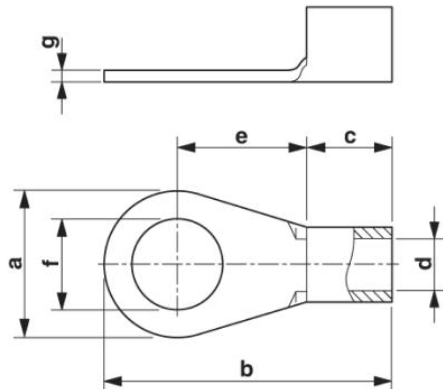

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;