


# SACC-DSIV-M12MSB-5CON-L180-SI

Order No.: 1528206




<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1528206>

Sensor/Actuator flush-type plug, 5-pos., M12, B-coded, rear/screw mounting with Pg9 thread, with straight solder connection

Commercial data	
EAN	 4 046356 023184
Note	Made-to-order
sales group	D125
Pack	10 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.02166 KG
Net weight per piece	0.0201 KG
Catalog page information	Page 75 (PC-2005)

**Product notes**

WEEE/RoHS-compliant since: 12/20/2005



<http://www.download.phoenixcontact.com>  
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>Ambient conditions</b>	
Degree of protection	IP67
<b>General</b>	
Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Contact resistance	≤ 0.003 Ω

Insulation resistance	$\geq 1 \text{ T}\Omega$
Coding	B - inverse
Status display	No
Surge voltage category	II
Pollution degree	3
Connection method	Solder pins

#### Material

Inflammability class according to UL 94	V0
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PBT
Material, knurls	Nickel-plated brass
Sealing material	NBR

#### Certificates / Approvals


Certification

Certifications applied for:

Certification Ex:

#### Drawings

Schematic diagram

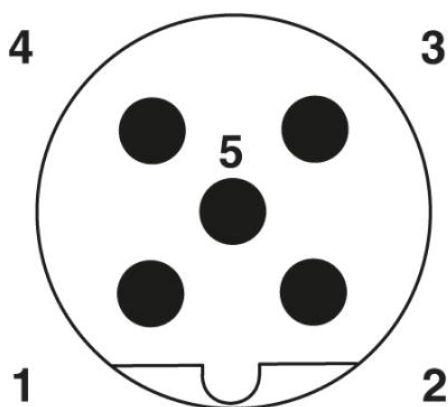

Pin assignment M12 male connector, 5-pos., B-coded, male side

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact  
Technical modifications reserved;