

RC-0000000T0FZ

Order No.: 1592992



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1592992>

Sleeve housing for cable connector, angled, Screw locking, M23,
shielded: Yes, Cable diameter: 2 mm...10.5 mm

Commercial data

EAN	 4 046356 193689
Note	Made-to-order
sales group	D300
Pack	8 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.13572 KG
Net weight per piece	0.13572 KG

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Note	Order information Order contact inserts and cable clamping/shield accessories separately
Type of locking	Screw locking
Contact connection method	Crimp connection
Type of contacts	Socket
Conductor entry	2 mm ... 10.5 mm

Ambient conditions

Ambient temperature	-20 °C ... 125 °C
Degree of protection	IP67

Material

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Gasket and O-ring material	FPM

Specifications according to DIN EN 61984:2001

Installation height max.	2000 m
--------------------------	--------

Certificates / Approvals



Certification

Certifications applied for:


Certification Ex:

Drawings

Diagram

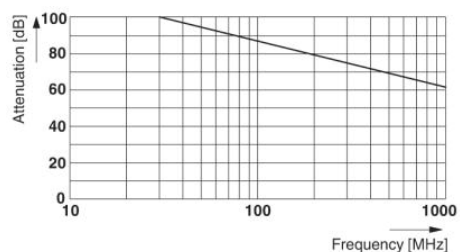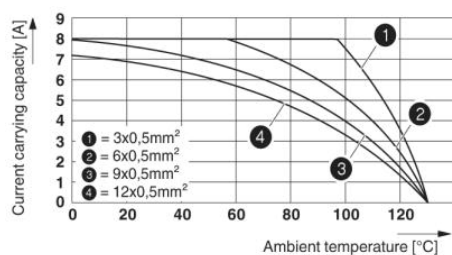

Dimensioned drawing

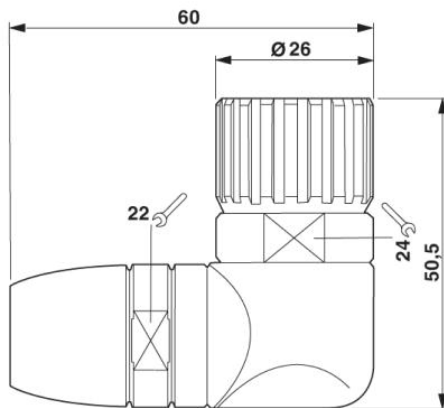

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;