

UC-000000080DU

Order No.: 1606030

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1606030>

Sleeve housing for cable connector, straight, Screw locking, M23,
shielded: Yes, Cable diameter: 2 mm...14.5 mm

Commercial data

EAN	
sales group	D300
Pack	20 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.09027 KG
Net weight per piece	0.09027 KG

Product notes

WEEE/RoHS-compliant since:
01/01/2003



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data**General**

Note	Order information Order contact inserts separately
Type of locking	Screw locking
Contact connection method	Crimp connection
Type of contacts	Socket, pin
Conductor entry	2 mm ... 14.5 mm

Ambient conditions

Ambient temperature	-20 °C ... 125 °C
Degree of protection	IP67

Material

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Gasket and O-ring material	FPM

Specifications according to DIN EN 61984:2001

Installation height max.	2000 m
--------------------------	--------

Certificates / Approvals



Certification

Certifications applied for:


Certification Ex:

Drawings

Diagram

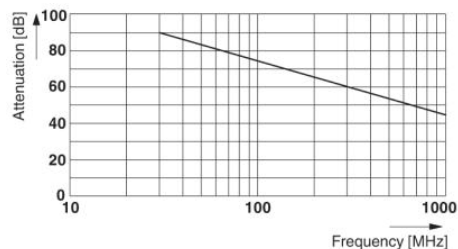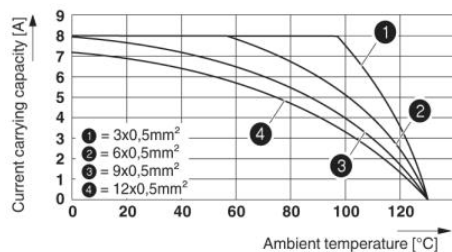

Dimensioned drawing

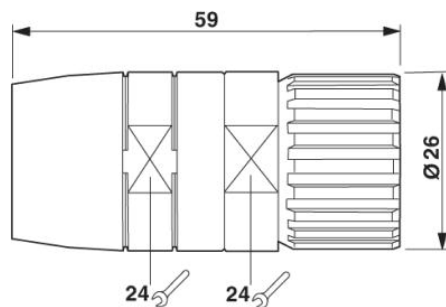

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;