

HC-B 32-TFQ-80/M1PG29G

Order No.: 1775680



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1775680>

Sleeve housing, for double locking latch, height 80 mm, with screw connection, 1x Pg29, straight cable entry

Commercial data

EAN	 4 017918 038250
sales group	D002
Pack	10 Pcs.
Customs tariff	85389099
Gross weight in pieces	0.48021 KG
Net weight per piece	0.4385 KG
Catalog page information	Page 579 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
01/31/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions

Height	80 mm
Width	79 mm
Length	94 mm
Wrench size, union nut	37 mm
External cable diameter	18 mm ... 27 mm

Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	For contact inserts HC-B32, DD144, M
Type	B32
Housing type	Sleeve housings
Locking type	For double locking latch
No. of cable outlets	1
Cable exit	Straight
Screw connection	with
Type of the screw connection	1x Pg29
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray
Cable gland material	Nickel-plated brass
Cable seal material	NBR

Certificates / Approvals



Certification


GOST

Certifications applied for:

Certification Ex:

Drawings

Dimensioned drawing

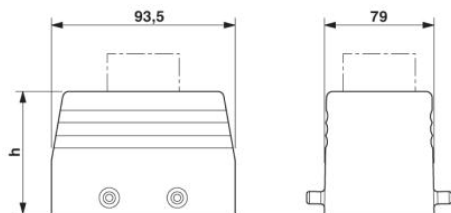

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;