

HC-B 48-TFL-96/M1PG29S

Order No.: 1772133

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1772133>

Sleeve housing, for single locking latch, height 96 mm, with screw connection, 1x Pg29, lateral cable entry

Commercial data

EAN	 4 017918 036805
sales group	D002
Pack	1 Pcs.
Customs tariff	85389099
Gross weight in pieces	0.7488 KG
Net weight per piece	0.6709 KG
Catalog page information	Page 571 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
01/31/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Dimensions**

Height	96 mm
Width	89 mm
Length	131.5 mm
Wrench size, union nut	37 mm
External cable diameter	18 mm ... 27 mm

Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	For contact inserts HC-B48, DD216, M
Type	B48
Housing type	Sleeve housings
Locking type	for single locking latch
No. of cable outlets	1
Cable exit	Lateral
Screw connection	with
Type of the screw connection	1x Pg29
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray
Cable gland material	Nickel-plated brass
Cable seal material	NBR

Certificates / Approvals



Certification


GOST

Certifications applied for:

Certification Ex:

Drawings

Dimensioned drawing

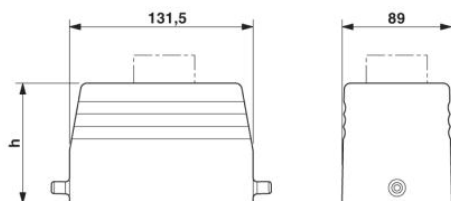

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;