

CK2,5-ED-1,00BU AU

Order No.: 1674833



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1674833>

Turned 2.5 crimp contact, individual female contact, core diameter
0.75 to 1.0 mm², gold-plated

Commercial data

EAN	 4 017918 135539
sales group	D090
Pack	100 Pcs.
Customs tariff	74152900
Gross weight in pieces	0.00159 KG
Net weight per piece	0.0015 KG
Catalog page information	Page 415 (C-4-2013)

Product notes

WEEE/RoHS-compliant since:
01/01/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Electrical characteristics

Note	for HC-M-06, HC-M-HV, HC-M-08, HC-M-20, HC-A, HC-BB, HC-B, and HC-HV contact carriers, the quality of a crimp connection is determined by DIN EN 60352-2, gold-plated contacts recommended at $U < 5 \text{ V}$ and $I < 5 \text{ mA}$
------	--

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Mechanical characteristics

Conductor cross section	0.75 mm ² ... 1 mm ²
Connection cross section AWG	18
Stripping length of the individual wire	7.5 mm (9.5 mm at HC-M-HV...)
Insertion/withdrawal cycles	≥ 500

General

Type	Individual female contact
Series	HC-M-06
Connection method	Crimp connection
Assembly instructions	At voltages of < 5 V and currents < 5 mA, gold-plated contacts are recommended.
Connection	for HC-M-06, HC-M-HV, HC-M-08, HC-M-20, HC-A, HC-BB, HC-B and HC-HV contact carriers. The quality of a crimp connection is determined by the DIN EN 60 352-2.

Material data

Contact material	Copper alloy
Contact surface material	Gold-plated

Certificates / Approvals



Certification GOST

Certifications applied for:


Certification Ex:

Accessories

Item	Designation	Description
Tools		
1676734	CK1,6/2,5-MWZ	Assembly tool, for CK 1.6... crimp contacts for small conductor cross sections
1662722	CK2,5-EWZ	Contact removal tool, for turned CK 2,5... contacts
1687419	CRIMPFOX-1,6/2,5-ED-4,0	Crimping pliers, for turned contacts, CK 1.6 ED... and CK 2.5 ED...

Drawings

Dimensioned drawing

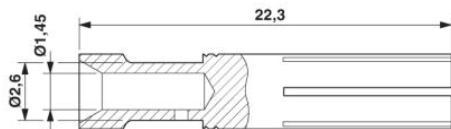

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;