


**CK4,0-ED-1,50ST AG**

Order No.: 1663239

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1663239>Turned 4.0 crimp contact, individual male contact, core diameter 1.5 mm<sup>2</sup>, silver-plated

Commercial data	
EAN	 4 017918 123048
sales group	D090
Pack	25 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.00309 KG
Net weight per piece	0.00309 KG
Catalog page information	Page 463 (C-4-2013)

## Product notes

WEEE/RoHS-compliant since:  
01/01/2005

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>Electrical characteristics</b>	
Note	For HC-M-3 modules
<b>Ambient conditions</b>	
Ambient temperature (operation)	-40 °C ... 125 °C

### Mechanical characteristics

Conductor cross section	1.5 mm <sup>2</sup>
Connection cross section AWG	16
Stripping length of the individual wire	9 mm
Insertion/withdrawal cycles	≥ 500

### General

Type	Individual male contact
Series	HC-M-03
Connection method	Crimp connection

### Material data

Contact material	Copper alloy
Contact surface material	silver-plated

### Certificates / Approvals



Certification GOST, UL Recognized

Certifications applied for:

Certification Ex:

### Accessories

Item	Designation	Description
------	-------------	-------------


#### Tools

1662735	CK4,0-EWZ	Contact removal tool, for rotated CK-4,0-... contacts
1205846	CRIMPFOX-4,0-ED-2,50	Crimping pliers, for CK 4.0... contacts, for conductor cross sections 1.5 - 2.5 mm <sup>2</sup>

## Drawings

### Dimensioned drawing

---

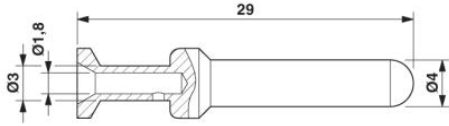

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact  
Technical modifications reserved;