


CK4,0-ED-2,50ST AG

Order No.: 1663242



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1663242>

Turned 4.0 crimp contact, individual male contact, core diameter 2.50 mm², silver-plated

Commercial data	
EAN	 4 017918 123055
sales group	D090
Pack	25 Pcs.
Customs tariff	74152900
Gross weight in pieces	0.00316 KG
Net weight per piece	0.003 KG
Catalog page information	Page 463 (C-4-2013)

Product notes

WEEE/RoHS-compliant since:
01/01/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Electrical characteristics	
Note	For HC-M-3 modules
Ambient conditions	
Ambient temperature (operation)	-40 °C ... 125 °C

Mechanical characteristics

Conductor cross section	2.5 mm ²
Connection cross section AWG	14
Stripping length of the individual wire	9 mm
Insertion/withdrawal cycles	≥ 500

General

Type	Individual male contact
Series	HC-M-03
Connection method	Crimp connection

Material data

Contact material	Copper alloy
Contact surface material	silver-plated

Certificates / Approvals



Certification GOST, UL Recognized

Certifications applied for:

Certification Ex:

Accessories


Item	Designation	Description
------	-------------	-------------

Tools

1662735	CK4,0-EWZ	Contact removal tool, for rotated CK-4,0-... contacts
1205846	CRIMPFOX-4,0-ED-2,50	Crimping pliers, for CK 4.0... contacts, for conductor cross sections 1.5 - 2.5 mm ²

Drawings

Dimensioned drawing

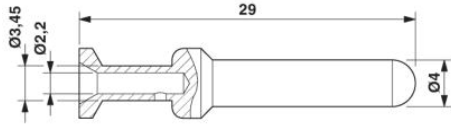

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;