


# CK4,0-ED-10,00ST AG

Order No.: 1586198



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1586198>

Turned 4.0 crimp contact, single male contact, 10 mm<sup>2</sup> conductor cross section, silver-plated

Commercial data	
EAN	4  046356 360234
sales group	D090
Pack	25 Pcs.
Customs tariff	85369010
Gross weight in pieces	0.00311 KG
Net weight per piece	0.00311 KG
Catalog page information	Page 463 (C-4-2013)

### Product notes

WEEE/RoHS-compliant since:  
04/03/2008



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

Electrical characteristics	
Note	for HC-M-02 modules
Ambient conditions	
Ambient temperature (operation)	-40 °C ... 125 °C

### Mechanical characteristics

Conductor cross section	10 mm <sup>2</sup>
Connection cross section AWG	8
Stripping length of the individual wire	18 mm (For wire Ø ≥ 6.4 mm) 15 mm (For wire Ø ≥ 4.3 mm)
Insertion/withdrawal cycles	≥ 500

### General

Type	Individual male contact
Series	HC-M-03
Connection method	Crimp connection

### Material data

Contact material	Copper alloy
Contact surface material	silver-plated

### Certificates / Approvals

Certification

Certifications applied for:

Certification Ex:

### Accessories

Item	Designation	Description
------	-------------	-------------


#### Tools

1662735	CK4,0-EWZ	Contact removal tool, for rotated CK-4,0-... contacts
1212072	CRIMPFOX-M	Basic pliers, for accommodating dies for a wide range of contact types
1212114	CRIMPFOX-TC 10	Crimping pliers, for turned contacts, 6.0 - 10 mm <sup>2</sup> , square crimp, incl. contact locator

## Drawings

### Dimensioned drawing

---

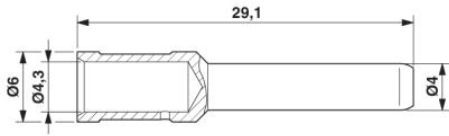

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact  
Technical modifications reserved;