

TCP 40/DC32V


Order No.: 0700040



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=0700040>

Thermal device circuit breaker, Number of positions: 1, Nominal current: 40 A, Nominal voltage: 32 V, Width: 6 mm, Fuse type: Slow-blow, Fuse type: Automatic device, Mounting type: On base element, Color: orange

Commercial data

EAN	 4 046356 079891
Note	Made-to-order
sales group	J711
Pack	50 Pcs.
Customs tariff	85362010
Gross weight in pieces	0.00432 KG
Net weight per piece	0.00432 KG
Catalog page information	Page 264 (C-6-2013)

Product notes

WEEE/RoHS-compliant since:
06/21/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Mounting type	On base element
Color	orange
Number of positions	1
Insulating material	PA

Electrical data

Fuse	Slow-blow
Fuse type	Automatic device
Rated voltage	32 V DC
Rated current I_n	40 A
Rated short-circuit switching capacity I_{cn}	150 A (≥ 3 switch-offs) 2000 A (≥ 1 switch-off) ≤ 50 A (300 switch-offs)

Dimensions

Height	20.3 mm
Width	6 mm
Depth	24 mm

Ambient conditions

Degree of protection	IP30 (Actuation area)
Ambient temperature (operation)	-40 °C ... 85 °C

Certificates / Approvals

Certification

Certifications applied for:


Certification Ex:

Additional products


Item	Designation	Description
General		
3036372	ST 4-FSI/C	Fuse modular terminal block, Connection method: Spring-cage connection, Cross section: 0.08 mm ² - 6 mm ² , AWG: 28 - 10, Nominal current: 30 A, Nominal voltage: 400 V, Width: 8.2 mm, Fuse type: C, Fuse type: Flat, Mounting type: NS 35/7,5, NS 35/15, Color: black
3036495	ST 4-FSI/C-LED 12	Fuse terminal block with LED for mounting on NS 35, for miniature circuit breakers, terminal width: 8.2 mm, color: Black
3036505	ST 4-FSI/C-LED 24	Fuse terminal block with LED for mounting on NS 35, for miniature circuit breakers, terminal width: 8.2 mm, color: Black
3118203	UK 6-FSI/C	Flat-type fuse terminal block, cross section: 0.2 - 6 mm ² , AWG: 26 - 8, width: 8.2 mm, color: black
3001925	UK 6-FSI/C-LED12	Flat-type fuse terminal block, cross section: 0.2 - 6 mm ² , AWG: 26 - 8, width: 8.2 mm, color: black, with light indicator, voltage light indicator: 12 V DC, current light indicator: 2 mA
3001938	UK 6-FSI/C-LED24	Flat-type fuse terminal block, cross section: 0.2 - 6 mm ² , AWG: 26 - 8, width: 8.2 mm, color: black, with light indicator, voltage light indicator: 24 V DC, current light indicator: 2 mA

Drawings

Application drawing

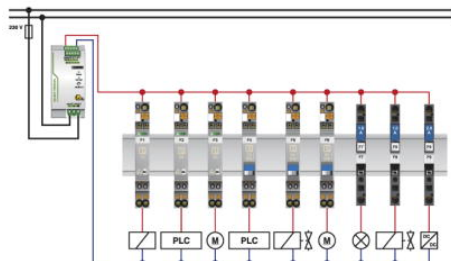

Dimensioned drawing

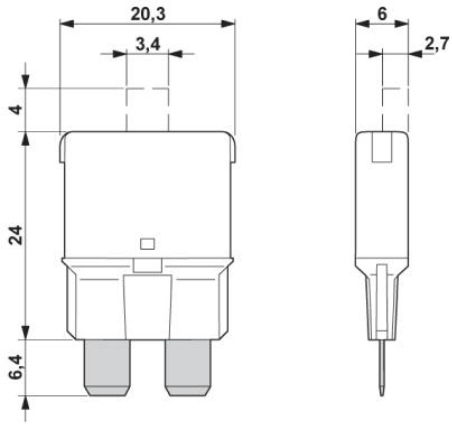

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;