

VS-09-T-2M16

Order No.: 1688353

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1688353>

D-SUB sleeve housing, shell size 1, IP67 degree of protection

Commercial data

EAN	 4 017918 817503
sales group	D500
Pack	5 Pcs.
Customs tariff	85472000
Gross weight in pieces	0.0392 KG
Net weight per piece	0.0392 KG
Catalog page information	Page 219 (C-2-2013)

Product notesWEEE/RoHS-compliant since:
05/10/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Insertion/withdrawal cycles	≥ 1000
External cable diameter	3 mm ... 9 mm
Cable exit	Angled
Color	gray

Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
---------------------------------	------------------

Degree of protection	IP67
----------------------	------

Material data

Inflammability class according to UL 94	V0
Housing material	PA

Certificates / Approvals

Certification

Certifications applied for:

Certification Ex:

Accessories

Item	Designation	Description
Assembly		
1688450	VS-M16 (3-6)	D-SUB cap nut with line seal, for sleeve housing VS-09-..., conductor diameter of 3 mm ... 6 mm
1688447	VS-M16 (5-9)	D-SUB cap nut with line seal, for sleeve housing VS-09-..., conductor diameter of 5 mm ... 9 mm

Connector/Adapter

1600027	CP-HCC 4	Coding profile, Number of positions: 1, Color: red
---------	----------	--

General

1688476	VS-09-TI-2EMV	D-SUB EMC inner sleeve, for sleeve housing VS-09-..., shell size 1, shielded
---------	---------------	--

Marking


2809128	ZBN 18:UNBEDRUCKT	Zack marker strip, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 18 mm, Lettering field: 18 x 5 mm
---------	-------------------	--

Protection and sealing elements

1670235	Q-PROT 9/11	Closing cap for Pg9/Pg11 to close unoccupied connections
---------	-------------	--

Drawings

Dimensioned drawing

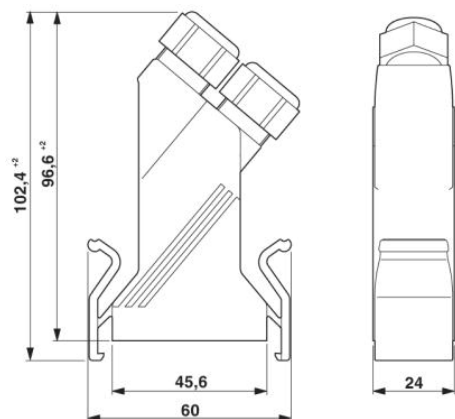

D-SUB sleeve housings

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;