

VS-25-T-2M20

Order No.: 1689792



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1689792>

D-SUB sleeve housing, shell size 3, IP67 degree of protection

Commercial data

EAN	 4 017918 915476
sales group	D500
Pack	5 Pcs.
Customs tariff	85472000
Gross weight in pieces	0.04596 KG
Net weight per piece	0.0428 KG
Catalog page information	Page 219 (C-2-2013)

Product notes

WEEE/RoHS-compliant since:
05/10/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions

Height	24 mm
Width	81 mm
Length	102 mm
External cable diameter	5 mm ... 13 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
---------------------------------	------------------

General

Type	D-SUB 25
Color	gray
No. of cable outlets	2
Cable exit	Angled
Type of the screw connection	M20
Housing material	PA
Inflammability class according to UL 94	V0

Certificates / Approvals

Certification

Certifications applied for:

Certification Ex:

Accessories

Item	Designation	Description
------	-------------	-------------

Assembly

1652127	VS-M20 (5-13)	D-SUB cap nut with line seal, for conductor diameter of 5 mm ... 13 mm, for sleeve housing VS-25-...
---------	---------------	---

Connector/Adapter

1600027	CP-HCC 4	Coding profile, Number of positions: 1, Color: red
---------	----------	--

General

1689802	VS-25-TI-2 EMV	D-SUB EMC inner sleeve, shell size 3, for sleeve housing VS-25-...
---------	----------------	---

Marking


2809128	ZBN 18:UNBEDRUCKT	Zack marker strip, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 18 mm, Lettering field: 18 x 5 mm
---------	-------------------	--

Protection and sealing elements

1670235	Q-PROT 9/11	Closing cap for Pg9/Pg11 to close unoccupied connections
---------	-------------	--

Drawings

Dimensioned drawing

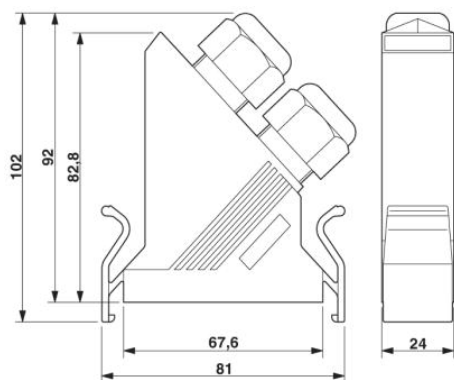

D-SUB sleeve housings

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;