

QPD W 3PE2,5 6-10 M25 0,5 BK

Order No.: 1582163



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1582163>

QUICKON panel feed-through, 3+PE-pos., 1.0 mm² ... 2.5 mm²/630 V/20 A, with QUICKON nut, black, for cable diameter of 6 mm ... 10 mm, with 4 welded-on 2.5 mm² cable wires, 0.5 m long, cut flat at the end.

Commercial data

EAN	4 046356 316842
sales group	D073
Pack	1 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.1015 KG
Net weight per piece	0.09972 KG
Catalog page information	Page 386 (C-4-2013)

Product notes

WEEE/RoHS-compliant since:
09/18/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Type	QPD 4x2,5
Length of cable	0.5 m
Color	black
Locking type	Screw locking

Connection method	QUICKON connection
	IDC connection
Number of positions	4
Note number of positions	3+PE
Wrench size, union nut	22 mm
Tightening torque, union nut	5 Nm
Tightening torque, counter nut	5 Nm
Wrench size, counter nut	27 mm
Number of connections	10
Conductor cross section stranded min.	1 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	1 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	16
Conductor cross section AWG/kcmil max	14

Conductor

Structure of individual litz in acc. with VDE 0295 / smallest wire diameter	VDE 0295 class 1 to 6 / min. 0.15 mm
Wire insulation material	PVC/PE/TPE/rubber
Wire diameter including insulation	2.5 mm ... 3.8 mm
External cable diameter	6 mm ... 10 mm
Conductor cross section	2.5 mm ²

Ambient conditions

Degree of protection	IP68 (2 m / 24 h)
	IP69K
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Temperature when conductor connected	-5 °C ... 50 °C

Electrical characteristics

Nominal current I _N	20 A
Rated current	20 A
Rated voltage (III/3)	690 V
Rated voltage (III/2)	1000 V
Rated voltage (II/2)	1000 V

Rated surge voltage (III/3)	6 kV
Rated surge voltage (III/2)	8 kV
Rated surge voltage (II/2)	8 kV

Mechanical characteristics

QUICKON connectability	max. 10
------------------------	---------

Material data

Contact material	Cu
Contact surface material	silver-plated
Contact carrier material	PA
Insulating material	PA
Inflammability class according to UL 94	V0
Surge voltage category	III
Pollution degree	3

Certificates / Approvals



Certification

cULus Listed, GOST, VDE Zeichengenehmigung, GL

Certifications applied for:

Certification Ex:

Accessories

Item	Designation	Description
Assembly		
1640715	Q-MU M25	Nut (plastic) to lock the contact carrier from the inside of the device
Connector/Adapter		
1582459	CP-QPD	Coding profile red, for pushing into the QUICKON dome and connector, can be positioned in 90° steps.

General

1582462	KV-DI-PG16-1XASI	Seal for one AS-i line, 17.2 x 9 mm, from NBR, black, for IP65/67 degree of protection
1582464	KV-DI-PG16-2XASI	Seal for two AS-i lines, 17.2 x 9 mm, from NBR, black, for IP65/67 degree of protection
1582150	QPD QSK 2,5	Protective cap made of transparent plastic for QPD QUICKON connection 4x 2.5 mm ² , IP54.
1582488	QPD QSK 2,5 FS	Plastic protective cap, for QPD-QUICKON connectors, green, with holding band, IP68

Marking

0819453	EMLP (13X9)R	Plastic label, Roll, white, unlabeled, can be labeled with: THERMOMARK ROLL, THERMOMARK X, THERMOMARK S1.1, Mounting type: Adhesive, Lettering field: 13 x 9 mm
0806932	GPE 13X 9 WH	Engraving material, Sheet, white, unlabeled, can be labeled with: Engraving, Plotter, Mounting type: Adhesive, Lettering field: 13 x 9 mm

Protection and sealing elements


1400284	SEALING PLUG 10X16 RD	Closing cap, for closing unused bore holes in multiple seals and cable glands, diameter 10 mm
---------	-----------------------	---

Tools


1670206	QSS 22	Allen wrench, for loosening and fastening the QUICKON union nut, WAF 22 mm
---------	--------	--

Drawings


Diagram

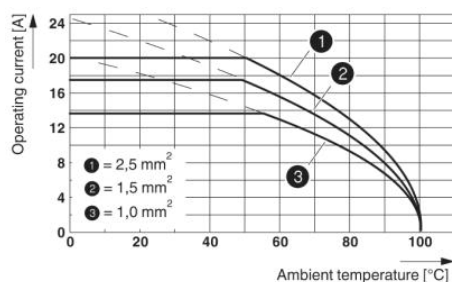

Dimensioned drawing

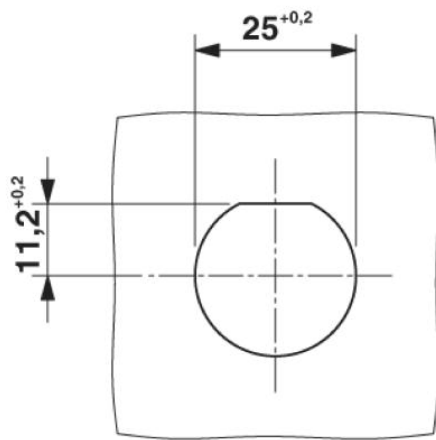

Panel cutout

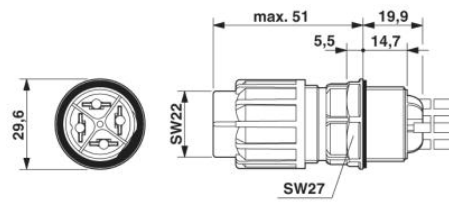

Dimensional drawing

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;