Extract from the online catalog

VIP-2/SC/PDM-2/16

Order No.: 2315256

http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=2315256

VARIOFACE module, with two equipotential busbars (P1, P2) for potential distribution, for mounting on NS 35 rails. Module width: 50.0 mm

Product notes

WEEE/RoHS-compliant since: 11/22/2007

Commercial data

EAN	4 046356 313360
sales group	I510
Pack	1 Pcs.
Customs tariff	85369010
Gross weight in pieces	0.1206 KG
Net weight per piece	0.1206 KG
Catalog page information	Page 548 (C-7-2013)

http://www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions

Width	50 mm
Height	65.5 mm
Depth	50 mm

Ambient conditions	
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General	
Nominal voltage U_N	250 V AC/DC
Max. current carrying capacity per branch	15 A
Total current	30 A (per potential)
Potential connections	Per potential (P1, P2) 2 power/8 distributor terminal blocks
Mounting position	any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Pollution degree	2
Surge voltage category	III

Connection data, supply	
Conductor cross section solid min.	0.2 mm²
Conductor cross section solid max.	6 mm²
Conductor cross section stranded min.	0.2 mm²
Conductor cross section stranded max.	4 mm²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	10
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3

Connection data, distribution	
Conductor cross section solid min.	0.2 mm²
Conductor cross section solid max.	4 mm²
Conductor cross section stranded min.	0.2 mm²
Conductor cross section stranded max.	2.5 mm²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3

Certificates / Approvals

Certification CSA, cULus Recognized

Certifications applied for:

Certification Ex:

Drawings

Circuit diagram

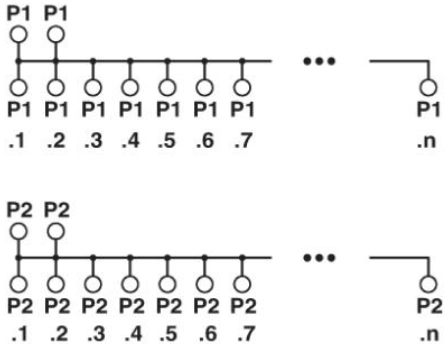

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg,Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
http://www.phoenixcontact.com

© 2014 Phoenix Contact
Technical modifications reserved;