

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER SYSTEM

HSTT 12-48 Q 2

COLOR:

BLANK = BLACK      5 = GREEN  
 1 = BROWN          6 = BLUE  
 2 = RED              10 = WHITE  
 3 = ORANGE        45 = YELLOW/GREEN  
 4 = YELLOW        C = CLEAR

QUANTITY PER CARTON (48 IN ONLY)

Q = 25 PCS  
 5 = 5 PCS  
 2 = 2 PCS


LENGTH INCHES [ mm ]

48 = [ 1219 ]      M = 1000 [ 304.8 ]  
 Y = [ 152.4 ]      D = 500 [ 152.4 ]  
                          T = 200 [ 61 ]  
                          C = 100 [ 30.5 ]  
                          L = 50 [ 15.2 ]  
                          Q = 25 [ 7.6 ]

TUBING SIZE - EXPENDED I.D. (SEE CHART)

TT = THIN WALL

TTV = THIN WALL VW-1 RATED

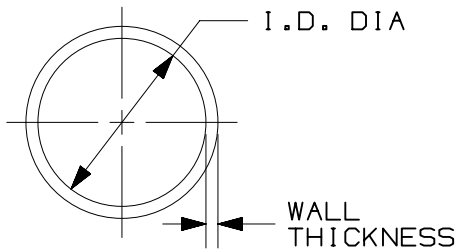

HEAT SHRINK TUBING SIZE	MIN. EXPANDED I.D. IN [mm]	MAX. RECOVERED I.D. IN [mm]	NOMINAL REC. WALL THICKNESS IN [mm]
05	0.046 [1.2]	0.023 [.6]	0.016 ± 0.003 [0.406 ± 0.076]
06	0.063 [1.6]	0.031 [.8]	0.017 ± 0.003 [0.432 ± 0.076]
09	0.093 [2.4]	0.046 [1.2]	0.020 ± 0.003 [0.508 ± 0.076]
12	0.125 [3.2]	0.062 [1.6]	0.020 ± 0.003 [0.508 ± 0.076]
19	0.187 [4.8]	0.093 [2.4]	0.020 ± 0.003 [0.508 ± 0.076]
25	0.250 [6.4]	0.125 [3.2]	0.025 ± 0.003 [0.635 ± 0.076]
38	0.375 [9.5]	0.187 [4.8]	0.025 ± 0.003 [0.635 ± 0.076]
50	0.500 [12.7]	0.250 [6.4]	0.025 ± 0.003 [0.635 ± 0.076]
75	0.750 [19.1]	0.375 [9.5]	0.030 ± 0.003 [0.762 ± 0.076]
100	1.000 [25.4]	0.500 [12.7]	0.035 ± 0.005 [0.889 ± 0.127]
150	1.500 [38.1]	0.750 [19.1]	0.040 ± 0.006 [1.016 ± 0.152]
200	2.000 [50.8]	1.000 [25.4]	0.045 ± 0.007 [1.143 ± 0.178]
300	3.000 [76.2]	1.500 [38.1]	0.050 ± 0.008 [1.270 ± 0.203]
400	4.000 [101.6]	2.000 [50.8]	0.055 ± 0.009 [1.397 ± 0.229]

NOTES:

1. MATERIAL: CROSSLINKED POLYOLEFIN
2. SHRINK RATIO: 2:1
3. "ALL WARRANTIES, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED. (USER IS RESPONSIBLE TO DETERMINE SUITABILITY OF PRODUCT FOR INTENDED USE)."
5. SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX.
6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVLENT [ mm ]
7. REELS OF THE PRODUCT ARE ALLOWED TO HAVE SPLICES.

PACK CODE	M	D	T	C	L	Q
ALLOWED SPLICES	4	3	2	1	1	0



TITLE		<b>THIN WALL HEAT SHRINK TUBING (HSTT / HSTTV)</b>		
		CUSTOMER DRAWING		
ITEM REVISION NAME		G035970M/00		
DATASET FILE NAME		G035970M_DC_GB0239KH_REV03/00A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]		<b>PANDUIT</b>		
.x ± .05 [ 1.3 ]      .xxx ± .010 [ .25 ] .xx ± .02 [ .5 ]      ANGLES ± 5 °				
DRAWING NUMBER:		<b>GB0239KH</b>		
DRAWN BY		DATE	CHK	SCALE
LGRAVITT		05-12-03		N.T.S.
DESCRIPTION		ECN	SHT 1 OF 1	
F. UPDATED DRAWING TO CURRENT STANDARDS AND REMOVED PRIOR REVISION MARKS		GB0239KH	<b>A</b>	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
4	07-29-15	JBN	MRJS	RGRO	F. UPDATED DRAWING TO CURRENT STANDARDS AND REMOVED PRIOR REVISION MARKS	GB0239KH

D101000A/16