


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:


1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

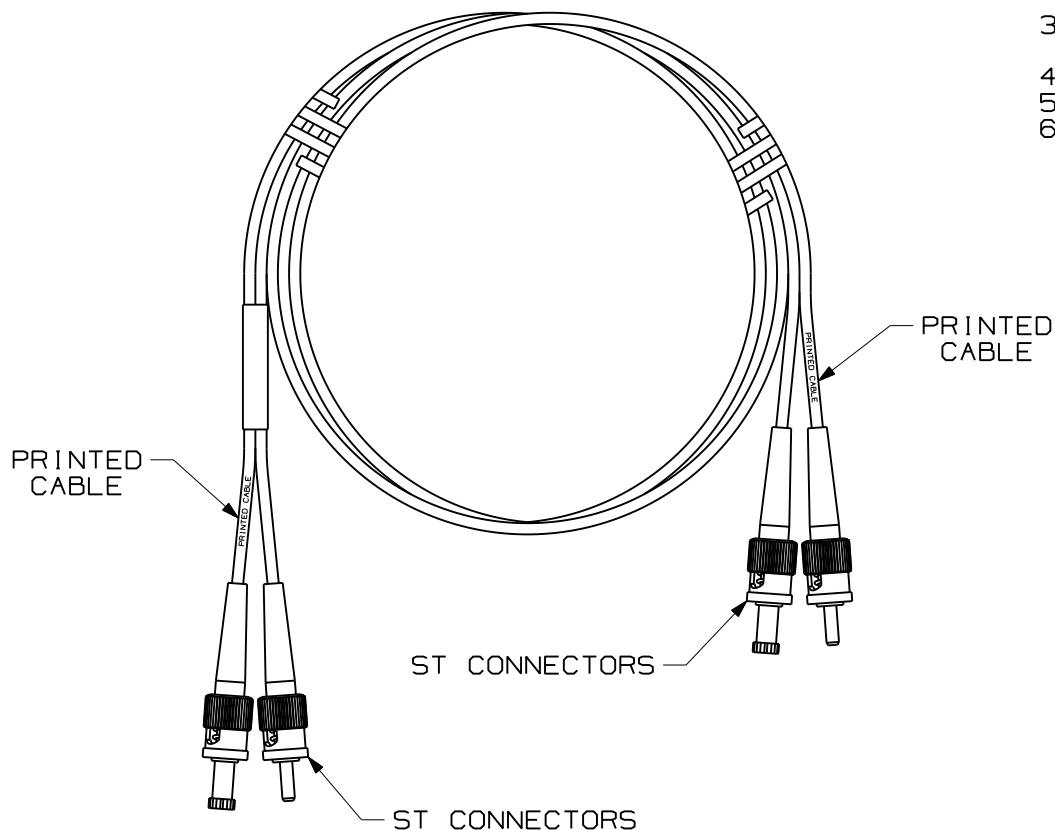

NETKEY FIBER OPTIC PATCH CORD  
 DUPLEX ST TO ST CONFIGURATION  
 CUSTOMER DRAWING



**PANDUIT**™  
 CORP.  
 TINLEY PARK, ILL 60477



ALL DIMENSIONS ARE GIVEN IN INCHES  
 UNLESS OTHERWISE SPECIFIED.  
 DIMENSIONAL TOLERANCES ARE:  
 (.X) ±.010 (0.3)  
 (.XX) ±.003 (0.08) ANGLES

DRAWING FILENAME  
 M01302CW\_DC/00A

SCALE  
 NONE

DRAWN BY  
 EFK

MATERIAL

PART NO.  
 NKF•GRO22-2M••  
 NKF•GLO22-2M••

DATE  
 12-15-09

DRAWING NO.  
 01302-58

CHK'D

SHEET 1 OF 2

SIZE  
**A**

R	12-15-09	EFK		RELEASED TO PRODUCTION	01302-58														
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH										

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


DUPLEX ST TO ST FIBER OPTIC PATCH CORD

PANDUIT PART NUMBER	LENGTH (**) M = METERS	CABLE				LC CONNECTOR		
		FIBER TYPE	COUNT	RATING	COLOR	BOOT COLOR	MAX. IL	MIN. RL
NKF6GR022-2M**	01, 02, 03, 05, 10	62.5/125 OM1	DUPLEX 3.0mm ZIPCORD	RISER (OFNR)	ORANGE	BLACK RED	0.75dB	26dB
NKF5GR022-2M**		50/125 OM2			AQUA			
NKF5GR022-2M**		50/128 OM3			YELLOW			40dB
NKF9GR022-2M**		SINGLEMODE OS1		LOW SMOKE ZERO HALOGEN (LSZH)	ORANGE	BLACK RED	0.75dB	26dB
NKF6GL022-2M**		62.5/125 OM1						
NKF5GL022-2M**		50/125 OM2						
NKF5GL022-2M**		50/128 OM3			AQUA	40dB		
NKF9GL022-2M**		SINGLEMODE OS1			YELLOW			

NETKEY FIBER OPTIC PATCH CORD  
DUPLEX ST TO ST CONFIGURATION  
CUSTOMER DRAWING



**PANDUIT**™  
CORP.  
TINLEY PARK, ILL 60477



ALL DIMENSIONS ARE GIVEN IN INCHES  
UNLESS OTHERWISE SPECIFIED.  
DIMENSIONAL TOLERANCES ARE:  
(.X) ±.03 | (.XXX) ±.010 | (.3) ±.015  
(.XX) ±.03 | (.8) ANGLES

DRAWING FILENAME  
M01302CW\_DC/00A

SCALE  
NONE

DRAWN BY  
EFK

MATERIAL

PART NO.  
NKF\*GR022-2M\*\*  
NKF\*GL022-2M\*\*

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	12-15-09	EFK		RELEASED TO PRODUCTION	01302-58				

DATE  
12-15-09  
CHK'D

DRAWING NO.  
01302-58

SIZE  
SHEET 2 OF 2  
A