




Keyword, Part Number or Cross-Reference

All Products Solutions Support

Bill of Materials

Home / Products / Wire Routing, Management & Protection / Wiring Duct & Accessories / Wiring Duct & Duct Covers / F.5X1WH6

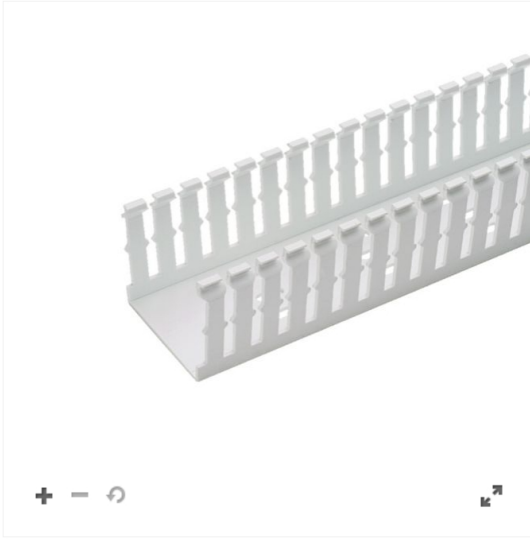

# F.5X1WH6



## Base Wiring Duct

Panduit® type F narrow slot wiring duct, .5 W x 1 H, 6' length, PVC, white.

Find A Distributor

Qty

Add to Bom

Specifications Packaging Detail Resources Related Products Top of Page ^

### Specifications

Application	(1) Type C Wiring Duct Cover with Protective Film Reduces Scrap and Labor Costs by Protecting the Surface during Storage, Handling, and Installation
Product Type	Base Wiring Duct
Color	White
Cover Part Number	C.5WH6
Flammability Rating	UL94 V-0
Standards Met	RoHS Compliant, UL Recognized, CE Compliant
Material	Lead-Free PVC
Mount Method	Mounting Holes
Measurement System	Metric
Wiring Duct Style	Narrow Slot Wiring Duct
Wiring Duct Type	F

Overall Height (In.)	1.06
Overall Height (mm)	26.9
Overall Length (ft.)	6
Overall Length (m)	1.8
Overall Width (In.)	0.69
Overall Width (mm)	17.5
Slot Width (In.)	0.2
Slot Width (mm)	5.1
Sub Brand	Panduct®
Part Features	Narrow finger and slot design closely matches the spacing of high-density components. Upper and lower scorelines allows easy finger and sidewall section removals. Double restricted slot design for retaining wires, eliminating hassle and saving time

## Packaging Detail

UPC	07498337482
Std. Pkg. Qty.	6
Std. Pkg. Volume (cf)	0.0292
Std. Ctn. Qty.	120
Std. Ctn. Volume (cf)	0.5832

## Resources

NOTE: Not all resources are available in your language.  
If product info is not displayed in your selected language, it will be coming. We will continue to improve the experience over time.

Language

Part Drawings	<a href="#">Part Drawing - DXF - 36897-758_R2(F.5X1)</a>	English	View DXF (1.50MB)	Download DXF	Share DXF
Part Drawings	<a href="#">Part Drawing - DXF - 36897-758-R2(F.5X1)-200</a>	English	View DXF (1.50MB)	Download DXF	Share DXF
Specification Sheets	<a href="#">Type C Wiring Duct Cover with Protective Film</a>	English	View PDF (374.10KB)	Download PDF	Share PDF

Cross References	<a href="#">Wiring Duct Available Colors and Sizes</a>	English	View PDF (115.54KB)	Download PDF	Share PDF
Part Drawings	<a href="#">3D Customer Drawing F.5X1LG6, F.5X1WH6</a>	English	View STP (4.77MB)	Download STP	Share STP
Part Drawings	<a href="#">WIRING DUCT - TYPE F DUCT WITH COVER .5 X 1</a>	English	View PDF (190.71KB)	Download PDF	Share PDF
Selection Guides	<a href="#">Wiring Duct Product Selection Guide</a>	English	View PDF (5.84MB)	Download PDF	Share PDF
Part Drawings	<a href="#">Panduct® type F narrow slot wiring duct, .5" W x 1" H</a>	English	View DWG (49.81KB)	Download DWG	Share DWG
Technical References	<a href="#">Chemical Resistance Information</a>	English	View PDF (670.90KB)	Download PDF	Share PDF

## Related Products



### F1X3LG6

The F1X3LG6 Panduct Lead-Free PVC Narrow Slot Wiring Duct features a narrow slot/finger design that closely matches the spacing of high-density components. Upper and lower scorelines allow for easy finger/sidewall section removal. UL 94 flame class of V-0 with a UL recognized continuous-use temperature up to 122°F (50°C). Mounting holes provided. Lead-free PVC. 3.12" x 1.25" (79.2 mm x 31.8 mm) and 6' (1.83 m) long. Cover sold separately. Color Light Gray. 6 per package.



### F2X3LG6

The F2X3LG6 Panduct Lead-Free PVC Narrow Slot Wiring Duct features a narrow slot/finger design that closely matches the spacing of high-density components. Upper and lower scorelines allow for easy finger/sidewall section removal. UL 94 flame class of V-0 with a UL recognized continuous-use temperature up to 122°F (50°C). Mounting holes provided. Lead-free PVC. 3.14" x 2.25" (79.8 mm x 57.2 mm) and 6' (1.83 m) long. Cover sold separately. Color Light Gray. 6 per package.



### F2X4LG6

The F2X4LG6 Panduct Lead-Free PVC Narrow Slot Wiring Duct features a narrow slot/finger design that closely matches the spacing of high-density components. Upper and lower scorelines allow for easy finger/sidewall section removal. UL 94 flame class of V-0 with a UL recognized continuous-use temperature up to 122°F (50°C). Mounting holes provided. Lead-free PVC. 4.1" x 2.25" (104.1 mm x 57.2 mm) and 6' (1.83 m) long. Cover sold separately. Color Light Gray. 6 per package.



### Email Support

Available 24/7



### 1-800-777-3300

Monday–Thursday: 7:00 am–6:30 pm (CST)  
Friday: 7:00 am–6:00 pm (CST)



### Where to Buy

Find a Panduit Distributor or Partner

About Us  
Research and Development  
Awards

Company Profile  
Media Resources  
Environmental, Social, and

Careers at Panduit  
The Hub – Partner Portal  
Product Registration



### Get Our Catalog

Download the PDF or request a copy be mailed to you.

Awards

Case Studies

Panduit Code of  
Conduct

Social, and  
Governance

Partner Ecosystem

World  
Headquarters

Panduit Connections Blog

-Choose a catalog-

Download

🌐 US & Canada | English

