

LC Connector Boot

Boot for LC Connectors, 3.0mm, Aqua

FMCBT3AQ-X

[Share](#) [Print](#) [Download Available Options](#)

Protect your fiber optic cables and improve durability with our LC connector boot, ideal for data center and network installations.

Fiber Type: OM3/OM4

- OM1
- OM2
- OM3/OM4
- OS2

Color: Aqua

- Aqua
- Black
- Blue
- Electric Ivory


Select product to view details, compare, or add to list:

Boot for LC Connectors, 3.0mm, Aqua
FMCBT3AQ-X

The threaded boot is intended for use with multimode OM3/OM4/OM5 OptiCam® connectors being installed on jacketed fiber optic cable that is 3.0mm in diameter. The boot is aqua, and comes in a pack of 10.

Boot for LC Connectors, 1.6/2.0mm, Aqua
FMCBT2AQ-X

The threaded boot is intended for use with multimode OM3/OM4/OM5 OptiCam® connectors being installed on jacketed fiber optic cable that is from 1.6mm to 2.0mm in diameter. The boot is aqua, and comes in a pack of 10.

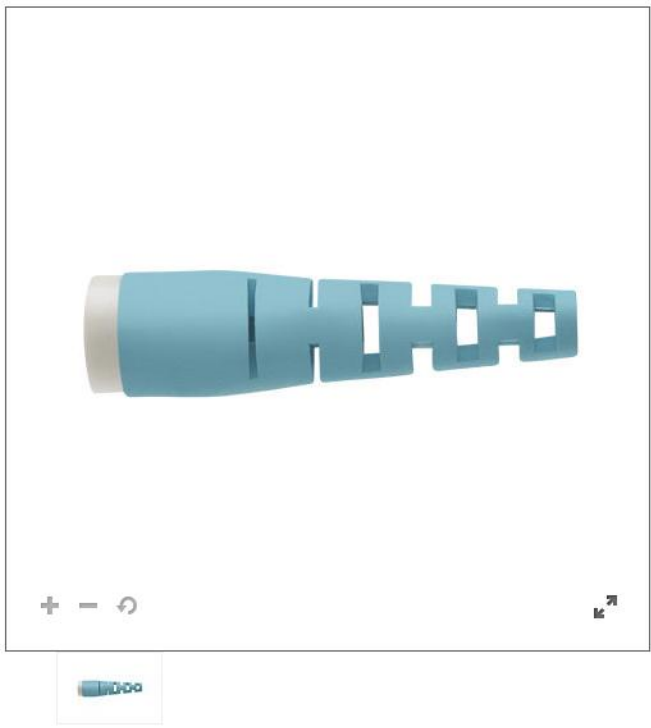

Add to List

Buy Here

☐ Compare

Find a Distributor

Learn More

Region & Language
US & Canada | English

Product Country of Use
United States of America

Set as Default

Choose Region/Language

X



Keyword, Part Number or Cross-Reference

Parts List

Product Type	Fiber Optic Connector Boot
Fiber Type	OM3/OM4
Color	Aqua
Sub Brand	OptiCam®
Maximum Connector Insertion Loss (dB)	0.3
Minimum Connector Return Loss (dB)	26
Standards Met	Exceed TIA/EIA-568-B.3 performance requirements
Connection Type	LC
Part Features	Simplifies tooling and termination, and virtually eliminates operator error by providing visual indication of proper termination after the cam step has been completed

Packaging Detail

UPC	07498364160
Std. Pkg. Qty.	10
Std. Pkg. Volume (cf)	0.0038
Std. Ctn. Qty.	100
Std. Ctn. Volume (cf)	0.0378

Resources

NOTE: Not all resources are available in your language.

If product info is not displayed in your selected language, it will be coming. We will continue to improve the experience over time.

Language

All

Videos	Video 4:3 - Product - OptiCam Overview 2006	English	View WMV (27.59MB)	Download WMV	Share WMV
Videos	Video 4:3 - Product - SC OptiCam Termination Demo	English	View WMV (20.74MB)	Download WMV	Share WMV
Videos	Video 4:3 - Product - ST OptiCam Termination Demo	English	View WMV (21.73MB)	Download WMV	Share WMV
Part Drawings	Part Drawings - DWG - FSCBT3BU-X_Rev_01	English	View DWG (499.19KB)	Download DWG	Share DWG
Part Drawings	Part Drawings - DXF - FSCBT3BU-X_Rev_01	English	View DXF (1.57MB)	Download DXF	Share DXF
Part Drawings	OPTICAM 3.0mm CABLE RETENTION BOOT ASSEMBLY	English	View PDF (69.56KB)	Download PDF	Share PDF

Frequently Bought Together

10 items



FOIPZ02Y
2 Fiber Cable, OM4, Indoor Interconnect, Plenum, 900µm Buffered

Add to List



FSPP912Y
12 Fiber Cable, OS2, Indoor Armored, Plenum, 900µm

Add to List



CMBBL-X
Mini-Com® Blank Module, 1 Port, Black

Add to List

Email Support
Available 24/7

800-777-3300
Monday - Friday 7:00 am-6:00 pm CST

Where to Buy
Find a Panduit Distributor or Partner

