

DISTRIBUTORS  
REPS LOCATION

DISTRIBUTOR  
INVENTORY SEARCH

Search

Select a category

Search

PRODUCTS

MARKETS

CUSTOM DESIGN

DISTRIBUTORS

ABOUT US

ASSISTANCE

CONTACT

CATEGORIES

Square Pin Connectors

GRID

All

ROWS

All

TYPE

All

For more information or to request assistance, please contact [sales@precidip.com](mailto:sales@precidip.com)

« Back to search results

YOUR SELECTED PRODUCT

## Square Pin Connectors - 0.5 / 0.635 mm

SERIES  
892


**892-PP-NNN-10-004101**

Double row  
2.54 mm, Straight solder tail, Square pin diam. 0.635 mm

Square pin headers, solder tail

Technical specs.:

- Insulator: Black glass filled polyester PA-GF30-FR
- Flammability: UL 94V-O
- Contact: Brass
- Connecting pin: Square 0.635 mm
- Mechanical life: Min. 100 cycles
- Rated current: 3 A
- Dielectric strength: Min. 1000 V RMS



Ordering information RoHS-compliant parts

PP Plating code	Termination	Connecting pin
70	Gold flash	Gold flash
80	Tin	Tin
18	Tin	Gold 0.25 µm

NNN number of poles. Replace NNN with the requested number of poles, e.g. 890-70-NNN-10-001101 for a single row version with 8 pins becomes 890-70-008-10-001101.

General technical specs.


View CAD

**892-PP-NNN-10-XXX101**

Straight square pin header, solder tail, double row.

Square pin 0.635 mm

Availability from: 4 to 80 contacts  
Standard number of contacts 80.

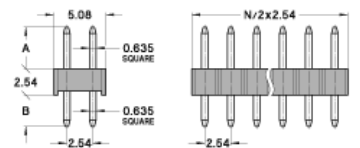


**892-PP-NNN-10-001101**

Straight square pin header, solder tail, double row.

Square pin 0.635 mm

Availability from: 4 to 80 contacts  
Standard number of contacts 80.

A = 6 mm  
B = 3.1 mm

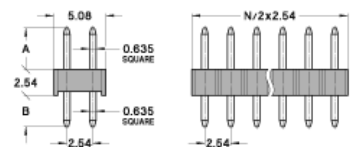

**892-PP-NNN-10-002101**

Straight square pin header, solder tail, double row.

Square pin 0.635 mm

Availability from: 4 to 80 contacts  
Standard number of contacts 80.

A = 7 mm  
B = 3 mm

---

**892-PP-NNN-10-003101**

Straight square pin header, solder tail, double row.

**Square pin 0.635 mm**

Availability from: 4 to 80 contacts  
Standard number of contacts 80.

A = 8.5 mm  
B = 3 mm

---

**892-PP-NNN-10-004101**

Straight square pin header, solder tail, double row.

**Square pin 0.635 mm**

Availability from: 4 to 80 contacts  
Standard number of contacts 80.

A = 14.9 mm  
B = 3 mm

---

**CAD CATALOG**

- Literature
- Catalog
- CAD catalog

**ABOUT PRECI-DIP**

- Career
- Contact
- Events

**OTHER INFO**

- Feedback
- Legal disclaimer
- Cross references

**NEWSLETTER**

Stay informed!

**subscription**