



RUE SAINT-HENRI 11, P.O. BOX 834 - CH-2800 DELÉMONT / SWITZERLAND

## Your selected product

### Square Pin Connectors - Right angle solder tail

Series 892

**892-PP-NNN-20-001101**

Double row

2.54 mm, Right angle solder tail, Square pin diam. 0.635

Right angle square pin headers, solder tail

### Technical specs.:

**Insulator:** Black glass filled polyester PA-GF30-FR

**Flammability:** UL 94V-O


**Contact:** Brass

**Connecting pin:** Square 0.635 mm

**Mechanical life:** Min. 100 cycles

**Rated current:** 3 A

**Dielectric strength:** Min. 1000 V RMS

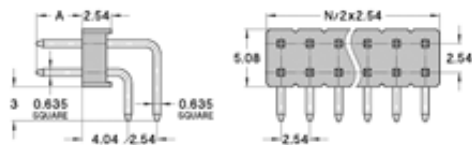

### Ordering information RoHS-compliant parts

PP Plating code	Termination	Connecting pin
70	Gold flash	Gold flash
80	Tin	Tin
18	Tin	Gold 0.25 µm

**NNN** number of poles. Replace **NNN** with the requested number of poles, e.g. 890-70-**NNN**-20-006101 for a single row version with 8 pins becomes 890-70-**008**-20-006101.

[General technical specs.](#) [View CAD](#)

### 892-PP-NNN-20-001101


Right angle square pin header, solder tail, double row.

**Square pin Ø 0.635 mm**

Availability from: 4 to 80 contacts.

Standard number of contacts 80.

A = 6 mm

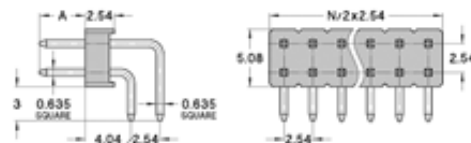

### 892-PP-NNN-20-002101

Right angle square pin header, solder tail, double row.

**Square pin Ø 0.635 mm**

Availability from: 4 to 80 contacts.

Standard number of contacts 80.

A = 7 mm

