



RUE SAINT-HENRI 11, P.O. BOX 834 - CH-2800 DELÉMONT / SWITZERLAND

Your selected product

PCB Connectors - Wire-wrap

Series 326

326-83-1NN-41-001101

Single row

2.54 mm, Wire-wrap, Mating pin Ø 0.47 mm

Socket connectors with wire-wrap terminations and connecting pin for board stacking.

Technical specs.:

Insulator: Black glass filled polyester PCT-GF30-FR

Flammability: UL 94V-O

Sleeve: Brass CuZn36Pb3 (C36000)

Contact: Clip (4 finger): Beryllium copper (C17200)

Mating pin Ø: 0.40 to 0.56 mm

Insertion force: 2 N typ.


Withdrawal force: 1 N typ.
(polished steel gauge Ø 0.43 mm)


Mechanical life: Min. 500 cycles

Rated current: 3 A

Contact resistance: Max. 10 mΩ

Dielectric strength: Min. 1000 V RMS

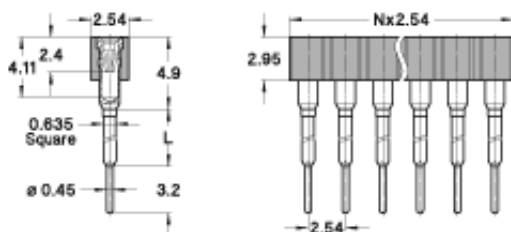

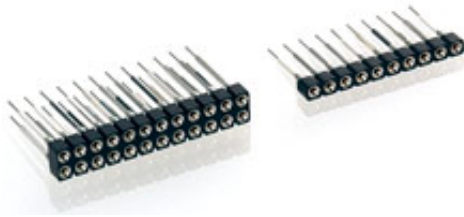

Ordering information RoHS-compliant parts

PP Plating code Sleeve Clip

83 Tin Gold 0.75 μm

NN number of poles. Replace **NN** with the requested number of poles, e.g. 426-83-2**NN**-41-001101 for a double row version with 16 pins becomes 426-83-2**16**-41-001101.

[General technical specs.](#) [View CAD](#)

326-83-1NN-41-001101


Wire-wrap socket connector with connecting pin, height 4.9 mm: 1-level, single row.

Mating pin $\varnothing$ 0.47 mm

Availability from: 2 to 64 contacts.

Standard number of contacts 64.

L = 5.9 mm

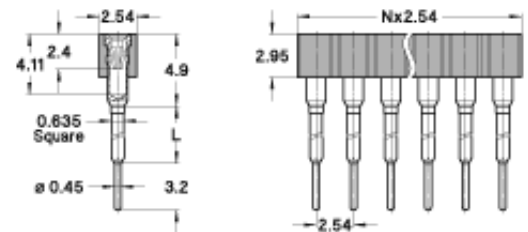

326-83-1NN-41-002101


Wire-wrap socket connector with connecting pin, height 4.9 mm: 2-level, single row.

Mating pin $\varnothing$ 0.47 mm

Availability from: 2 to 64 contacts.

Standard number of contacts 64.

L = 8.9 mm

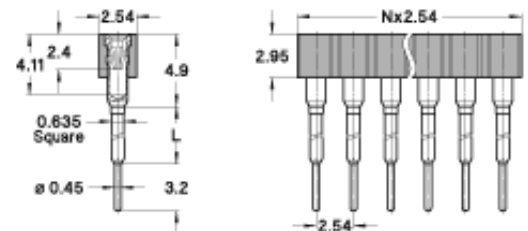

326-83-1NN-41-003101

Wire-wrap socket connector with connecting pin, height 4.9 mm: 3-level, single row.

Mating pin Ø 0.47 mm

Availability from: 2 to 64 contacts.

Standard number of contacts 64.

L = 11.9 mm

