



RUE SAINT-HENRI 11, P.O. BOX 834 - CH-2800 DELÉMONT / SWITZERLAND

Your selected product

PCB Connectors - Straight solder tail

Series 800

800-PP-NNN-10-002101

Single row

2.54/5.08 mm, Straight solder tail, Pin Ø 0.76 mm

Pin connectors, solder tail.

Technical specs.:

Insulator: Black glass filled polyester PCT-GF30-FR

Flammability: UL 94V-O



Contact: Brass CuZn36Pb3 (C36000)

Connecting pin Ø: 0.76 mm

Mechanical life: Min. 500 cycles

Rated current: 3 A

Dielectric strength: Min. 1000 V RMS

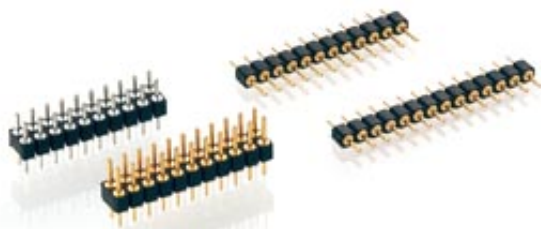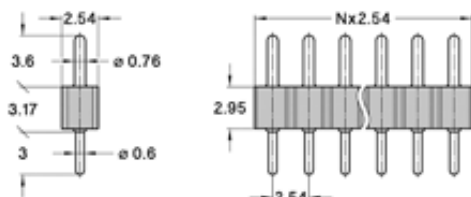

Ordering information RoHS-compliant parts

PP Plating code	Termination	Connecting pin
10	Gold 0.25 μm	Gold 0.25 μm
80	Tin	Tin

NNN number of poles. Replace **NNN** with the requested number of poles, e.g. 800-10-**NNN**-10-001101 for a single row version with 8 pins becomes 800-10-**008**-10-001101.

[General technical specs.](#) [View CAD](#)

800-PP-NNN-10-002101

Straight pin connector, height 3.2 mm: short pin, solder tail, single row.

Pin \varnothing 0.76 mm

Availability from: 2 to 64 contacts.

Standard number of contacts 64.

