



preci-dip


PCB CONNECTORS - RIGHT ANGLE SOLDER TAIL

Series: PCB Connectors - Right angle solder tail  
 399: Single row  
 2.54 mm, Right angle solder tail, Mating pin Ø 0.47

Right angle socket connectors, solder tail

Technical specs.:

Insulator: Black glass filled polyester  
 PCT-GF30-FR  
 Flammability: UL 94V-0  
 Sleeve: Brass CuZn36Pb3 (C36000)  
 Contact: Clip (4 finger); Beryllium copper (C17200)  
 Mating pin Ø: 0.40 to 0.56 mm  
 Insertion Forces: 2 N typ.  
 Withdrawal Forces: 1 N typ.  
 (polished steel gauge Ø 0.43 mm)  
 Mechanical life: Min. 500 cycles  
 Rated current: 3 A  
 Contact resistance: Max. 10 mΩ  
 Dielectric strength: Min. 1000 V RMS

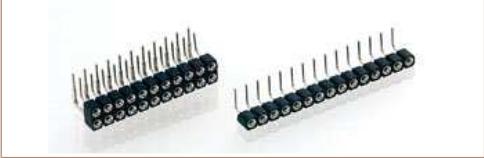



Ordering information RoHS-compliant parts

PP Plating code	Sleeve	Clip
87	Tin	Gold flash
83	Tin	Gold 0.75 µm

NN number of poles. Replace NN with the requested number of poles, e.g. 499-83-2NN-10-003101 for a double row version with 16 pins becomes 499-83-216-10-003101

General technical specs. ...

399-PP-1NN-10-003101



Right angle socket connector: single row.

Mating pin Ø 0.47

Availability from: 2 to 64 contacts.  
 Standard number of contacts 64.