

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.
- LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MINIMUM.
- OPERATING: 750 CYCLES MIN.



MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED NYLON UL94-0 COLOR-BLACK
- INSERT MATERIAL : GLASS FILLED NYLON UL94-0 COLOR-BLACK
- BACK PLATE MATERIAL : GLASS FILLED NYLON UL94-0 COLOR-BLACK
- LED SIZE : 3.2*2.0*7.0*P=2.54mm.
- SHIELD MATERIAL : GOLD PLATING OVER NICKEL.
- CONTACT MATERIAL : COPPER ALLOY 0.25mm THICKNESS PLATING NI.
- PLATING : PHOSPHOR BRONZE 0.35mm THICKNESS OR Ø0.46mm.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE TEMPERATURE : -40°C TO +85°C.
- OPERATION TEMPERATURE: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 255~265° (5~10 SECONDS)
- RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE No:E163191

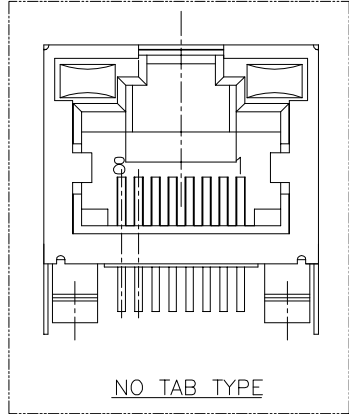

PART NUMBER	LED COLOR		TAB	GOLD PLATING
	LED 1	LED 2		
E5J88-11LJ22-L	GREEN	YELLOW	NO TAB	6u"
E5J88-14LJ22-L	GREEN	YELLOW	TOP TABS & SIDE TABS	6u"
E5J88-14LJ23-L	GREEN	YELLOW	TOP TABS & SIDE TABS	15u"
E5J88-21LJ22-L	GREEN	GREEN	NO TAB	6u"
E5J88-31LJ22-L	YELLOW	GREEN	NO TAB	6u"
E5J88-31LJ23-L	YELLOW	GREEN	NO TAB	15u"
E5J88-34LJ22-L	YELLOW	GREEN	TOP TABS & SIDE TABS	6u"
E5J88-34LJ23-L	YELLOW	GREEN	TOP TABS & SIDE TABS	15u"
E5J88-54LJ22-L	RED	GREEN	TOP TABS & SIDE TABS	6u"

DETACHED LISTS	← MM (INCH) →	RoHS Compliant			
	TOLERANCES EXCEPT AS NOTED				
	MM .0 ± 0.2 .00 ± 0.15 .000 ± 0.075 ANGLES ± 0.5	TITLE RJ45 SIDE ENTRY LED JACK	DFTO Cathy	DRAWING NO. CE5J3015-LA	SIZE A3
THIRD ANGLE PROJECTION	SCALE : 3:1	DATE 2006/09/20	/PART NO. SEE TABLE	DO NOT SCALE DRAWING	SHEET 1 OF 1