
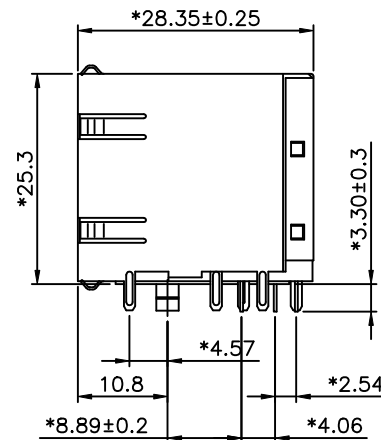


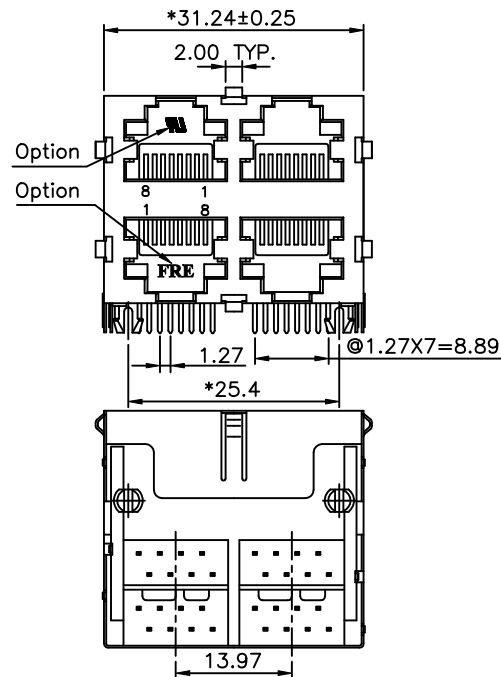

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
1		ADD P/N	JAMY	
			9/10/08	

NOTES:**ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : NYLON +30%.G.F(FR52) UL94V-0.
2. INSERT : NYLON+30%.G.F(FR52) UL94V-0.
3. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
4. PLATING : GOLD PLATING OVER NICKEL.
5. OPERATING LIFE : 750 CYCLES MIN.
6. PCB RETENTION PRE-SOLDER : 1 LB MIN.
7. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


1. STORAGE : -40°C TO +85°C.
 2. OPERATION: -40°C TO +85°C.
 3. WAVE SOLDERING TEMPERATURE: 255~265° (5~10 SECONDS)
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
UL & CUL FILE NO. E163191

ROHS PART NUMBER: E5908-XVAXXX-L

1-W/O TABS
5-W/ TABS

Gold Thickness:
1- 3u 2- 6u 3-15u
4-30u 5-50u

10-FRONT PEG 4.57, W/O "FRE" & "UL" LOGO
15- FRONT PEG 4.57, W/"FRE" & "UL" LOGO

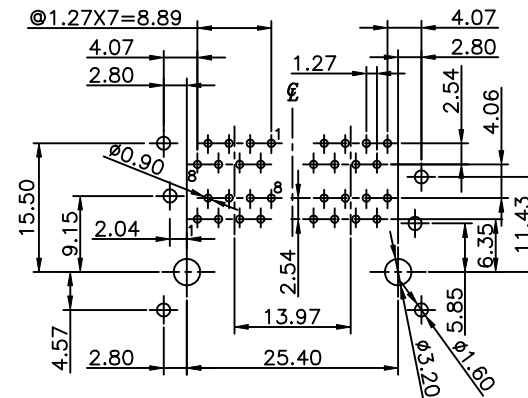

PC Board t=1.6mm
Component Side Shown

DETACHED LISTS	MM (INCH)	DFTO JAMY	DATE 3/15/05	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD JAMY	DATE 2008/09/10		
	MM	MFO	DATE		
	.0 ±0.10	APPV LUSHEN	DATE 2008/09/10		
	.00 ±0.05				
	.000 ±0.005			TITLE STAMPED PIN III STACKED GANGED JACK 2X2	
	ANGLES ± 0.01°	QT'Y :		DRAWING NO. GE593B54-LA	
	THIRD ANGLE PROJECTION	FINISH :		/PART NO. SEE NOTE	
		SCALE : 2:1		DO NOT SCALE DRAWING	
				SHEET X	OF Y

H

G

F

E

D

C

B

A