

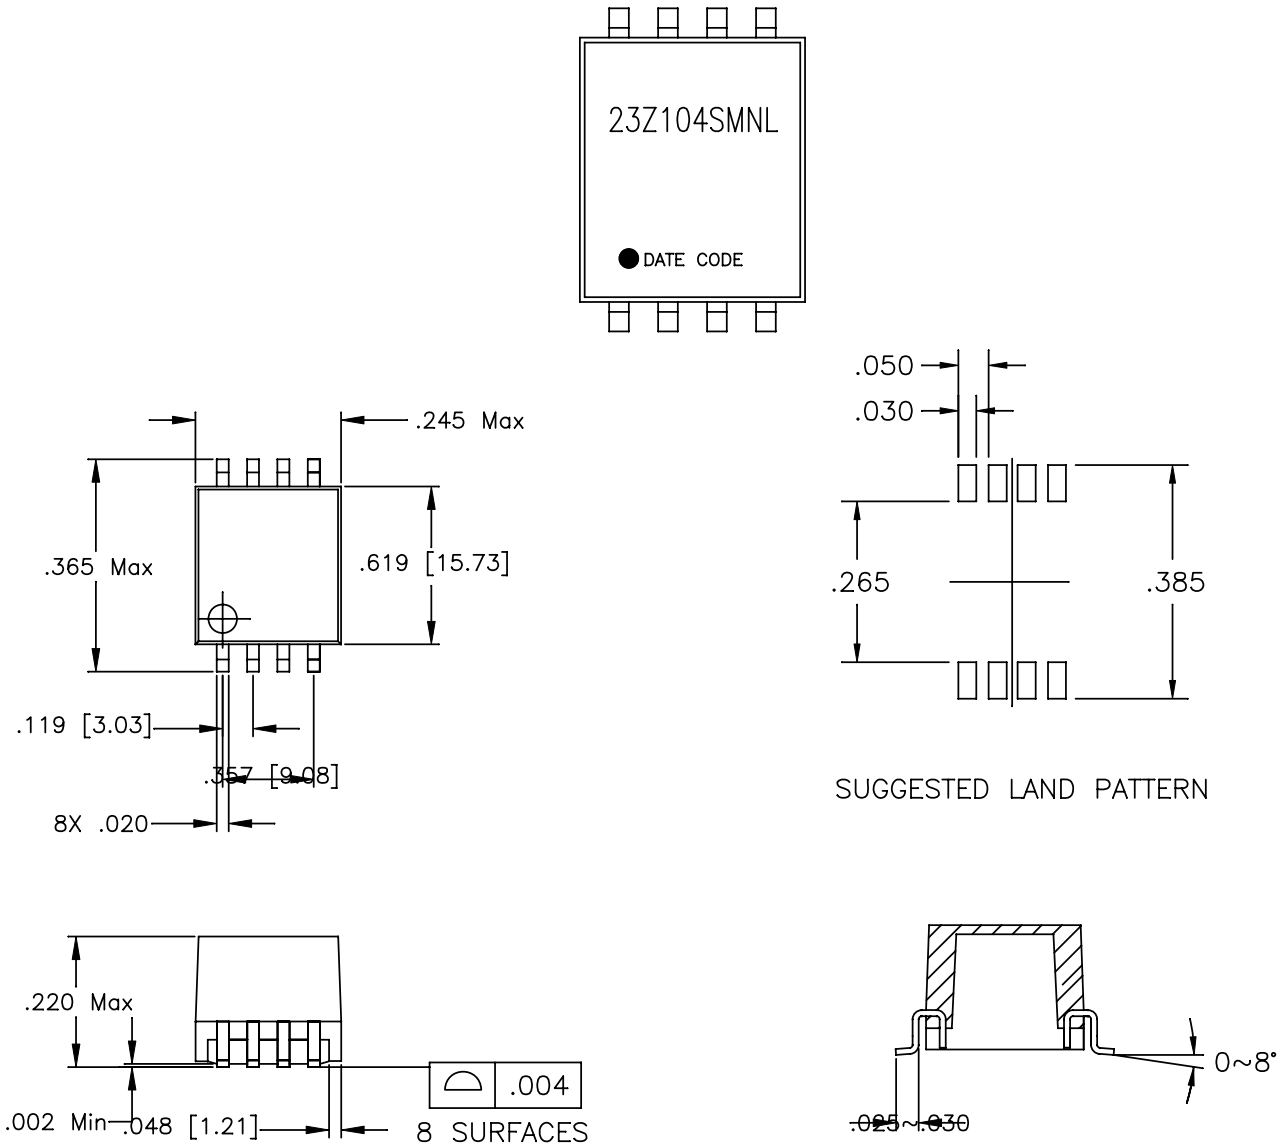


Electrical @ 25°C

PARAMETER	SPECIFICATIONS			
TURNS RATIO	(1-8):(2-7):(3-6):(4-5)=1 : 1 : 1 : 1 ±5%			
ISOLATION RESISTANCE (IR AT 500 VDC)	10G OHM MIN.			
DC RESISTANCE	0.2 OHMS MAX			
INDUCTANCE (OCL)	68 uH MIN (MEASURED AT 100 KHZ, 20 mVRMS)			
BETWEEN CHANNEL ISOLATION	500 VAC MIN @ 60 SECONDS			
IMPEDANCE	10,20 MHz	30 MHz	70 MHz	100 MHz
	700 OHM MIN	600 OHM MIN	200 OHM MIN	200 OHM MIN

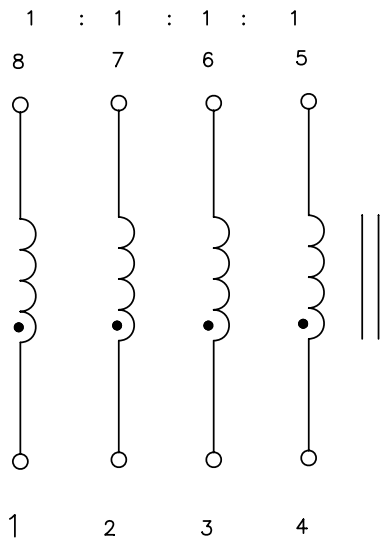

© Copyright, 2012. Pulse Electronics Corp. All rights reserved. Drawing specifications subject to change without notice. (10/12/12)

PULSE CONFIDENTIAL & PROPRIETARY	PRODUCT DESCRIPTION	PS DRAWING	SHEET:	DWG. NO./ PART NO.	REV.
	CHK,SIN,10D,1:1,SMT	PS-2420.001-A	1	23Z104SMNL	M13