

# BAS70WS

## SURFACE MOUNT SCHOTTKY DIODES

**VOLTAGE** 70 Volts **CURRENT** 0.2 Amperes

**SOD-323**


Unit: inch (mm)

### FEATURES

- Fast switching speed
- Surface mount package ideally suited for automatic insertion  
Electrical identical standard JEDEC
- High conductor
- In compliance with EU RoHS 2002/95/EC directives

### MECHANICAL DATA

- Case: SOD-323, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.008 gram
- Marking: A70

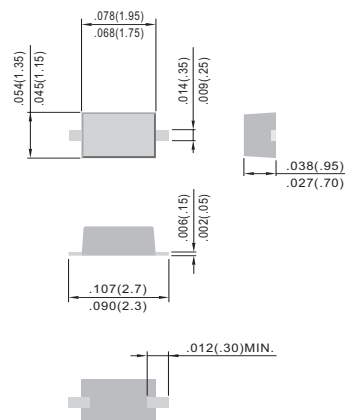

## ABSOLUTE RATINGS

| PARAMETER                                             | Symbol    | Value | Units |
|-------------------------------------------------------|-----------|-------|-------|
| Reverse Voltage                                       | $V_R$     | 70    | V     |
| Peak Reverse Voltage                                  | $V_{RRM}$ | 70    | V     |
| Average Rectified Current at Temp=25°C                | $I_R$     | 0.2   | A     |
| Non-repetitive Peak Forward Surge Current at t=1.0 ms | $I_{FSM}$ | 4     | A     |

## THERMAL CHARACTERISTICS

| PARAMETER                                | Symbol          | BAS70WS    | Units |
|------------------------------------------|-----------------|------------|-------|
| Power Dissipation                        | $P_{TOT}$       | 225        | mW    |
| Thermal Resistance , Junction to Ambient | $R_{\theta JA}$ | 556        | °C/W  |
| Junction Temperature                     | $T_J$           | 150        | °C    |
| Storage Temperature at Temp=25°C         | $T_{STG}$       | -55 to 150 | °C    |

# BAS70WS

## ELECTRICAL CHARACTERISTICS

| PARAMETER                    | Symbol     | Test Condition                                                  | MIN. | TYP. | MAX.                 | Units         |
|------------------------------|------------|-----------------------------------------------------------------|------|------|----------------------|---------------|
| Reverse Breakdown Voltage    | $V_{(BR)}$ | $I_R=10\text{ }\mu\text{A}$                                     | 70   | --   | --                   | V             |
| Reverse Current              | $I_R$      | $V_R=70\text{ V}$<br>$V_R=50\text{ V}$                          | --   | --   | 1.0<br>0.1           | $\mu\text{A}$ |
| Forward Voltage              | $V_F$      | $I_F=1.0\text{ mA}$<br>$I_F=10\text{ mA}$<br>$I_F=15\text{ mA}$ | --   | --   | 0.41<br>0.75<br>1.00 | V             |
| Maximum Junction Capacitance | $C_J$      | $V_R=0\text{ V}$ , $f=1.0\text{ MHz}$                           | --   | --   | 2.0                  | pF            |

## ELECTRICAL CHARACTERISTICS CURVE

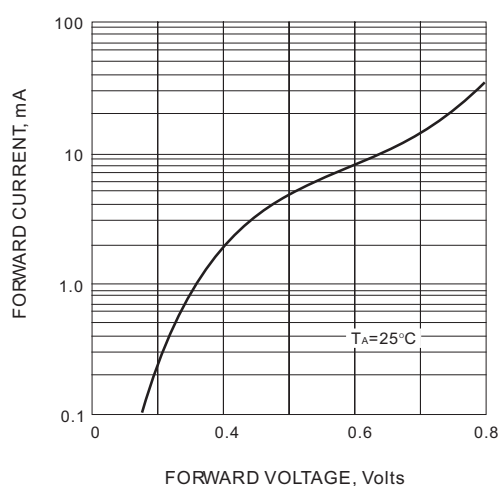


FIG. 1-TYPICAL FORWARD CHARACTERISTIC

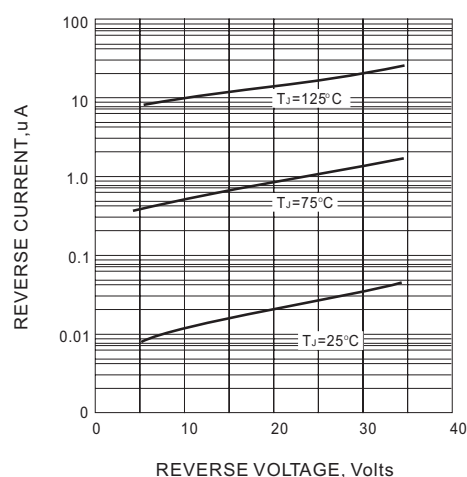


FIG. 2-TYPICAL REVERSE CHARACTERISTICS

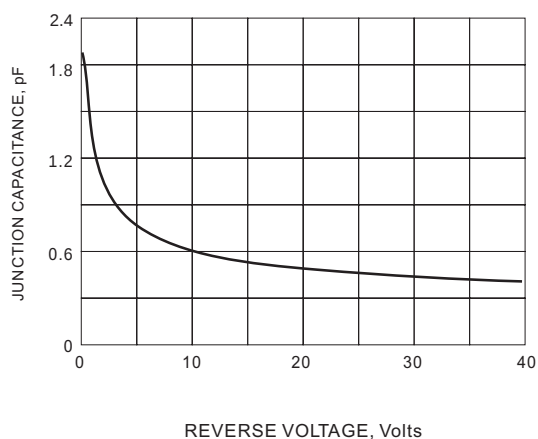


FIG. 3 TYPICAL JUNCTION CAPACITANCE


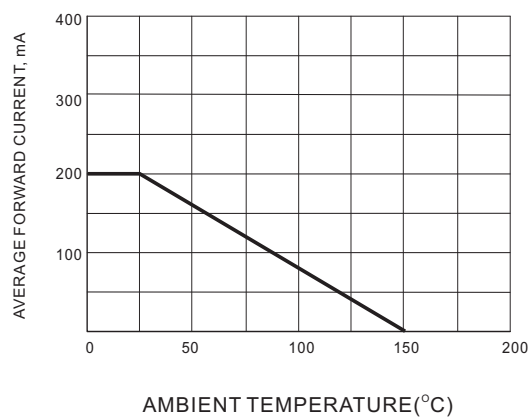


FIG. 4 FORWARD CURRENT DERATING

# BAS70WS

## MOUNTING PAD LAYOUT

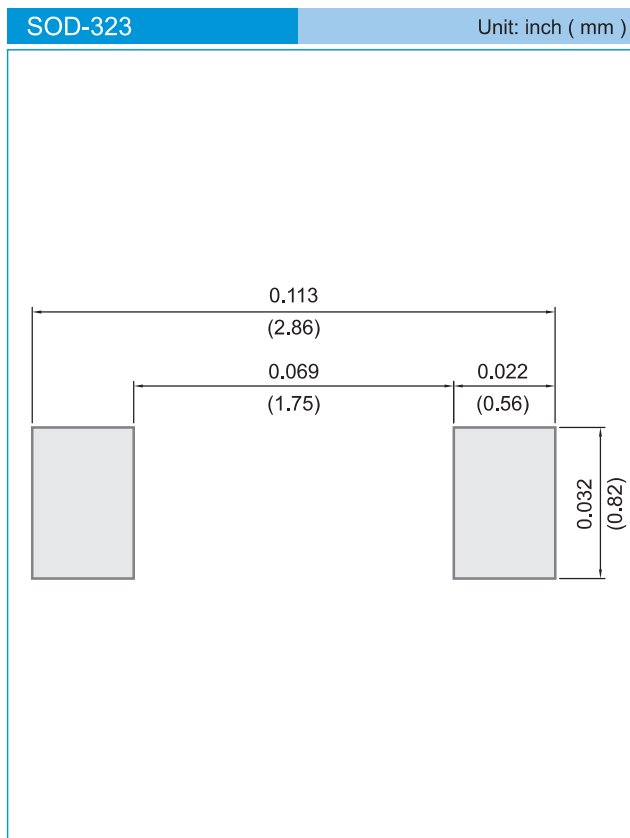

## ORDER INFORMATION

- Packing information
  - T/R - 12K per 13" plastic Reel
  - T/R - 5K per 7" plastic Reel

## LEGAL STATEMENT

### Copyright PanJit International, Inc 2009

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.