

BAT54TS

SURFACE MOUNT SCHOTTKY BARRIER


VOLTAGE 30 Volts **CURRENT** 0.20 Amperes

FEATURES

- Low turn-on voltage
- Fast switching
- PN Junction Guard Ring for Transient and ESD Protection
- In compliance with EU RoHS 2002/95/EC directives


MECHANICAL DATA

- Case: SOD-523, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0014 gram
- Polarity : Color band cathode
- Marking: L4



SOD-523

Unit: inch (mm)

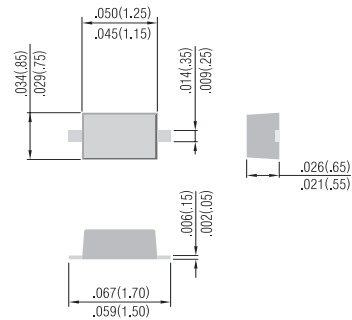

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. For capacitive load, derate current by 20%.

Parameter	Symbol	Value	Units
Peak Repetitive Reverse Voltage	V_{RRM}	30	V
Maximum Average Forward Current at $T_A=75^\circ\text{C}$	$I_{F(AV)}$	0.2	A
Peak Forward Surge Current, 1.0s single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	0.6	A
Maximum Instantaneous Forward Voltage	V_F	0.32@ $I_F=0.001\text{A}$ 1.0 @ $I_F=0.1\text{A}$	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	0.002@ $V_R=25\text{V}$	mA
Junction Capacitance at $V_R=1\text{V}$	C_J	10	pF
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	667	$^\circ\text{C}/\text{W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +125	$^\circ\text{C}$

BAT54TS

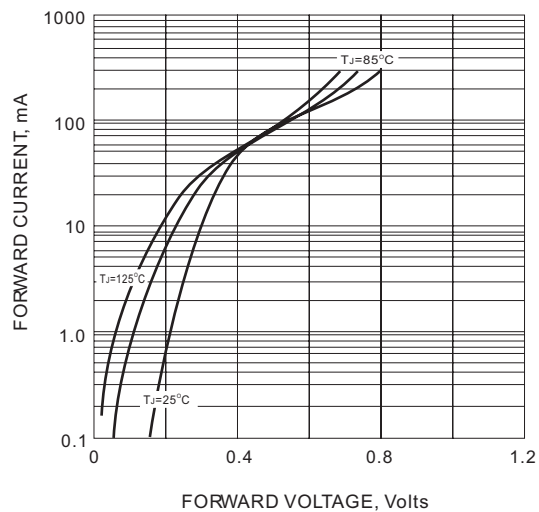


FIG. 1-TYPICAL FORWARD CHARACTERISTIC

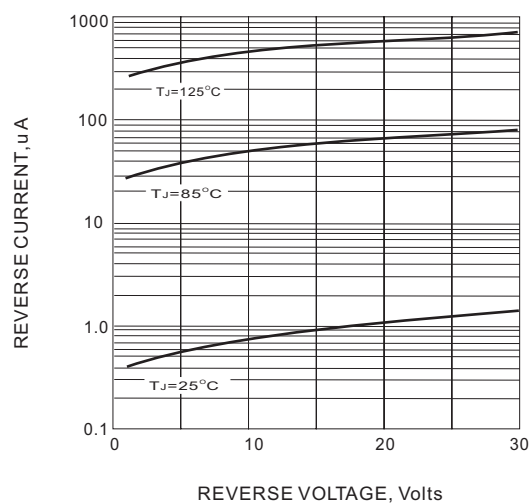


FIG. 2-TYPICAL REVERSE CHARACTERISTICS

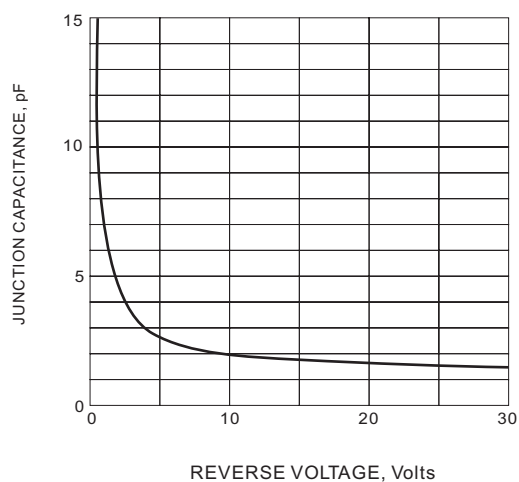


FIG. 3 TYPICAL JUNCTION CAPACITANCE

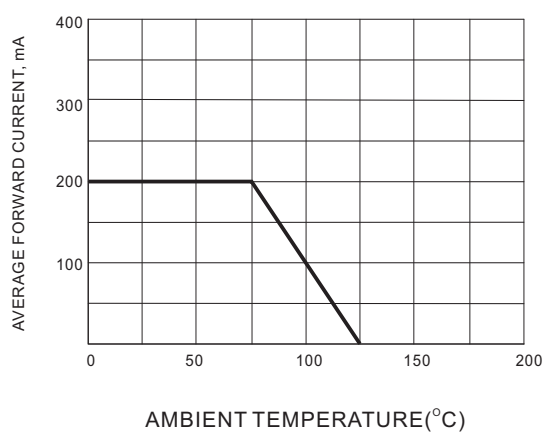



FIG. 4 FORWARD CURRENT DERATING

BAT54TS

MOUNTING PAD LAYOUT

SOD-523

Unit: inch (mm)

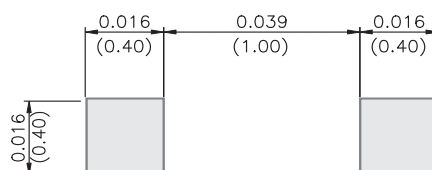

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 5K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2011

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.