



BAT54TW / ADW / CDW / SDW / DW

SURFACE MOUNT SCHOTTKY DIODE ARRAYS

VOLTAGE 30 Volts **POWER** 225mWatts


SOT-363 Unit : inch(mm)

FEATURES

- Isolated diode arrays for significant board space savings
- Surface mount package ideally suited for automatic insertion
- Extremely Fast Switching Speed
- Very Low VF: 0.347V (Typ) at IF = 10mA
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: SOT-363 plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0002 ounce, 0.006 gram

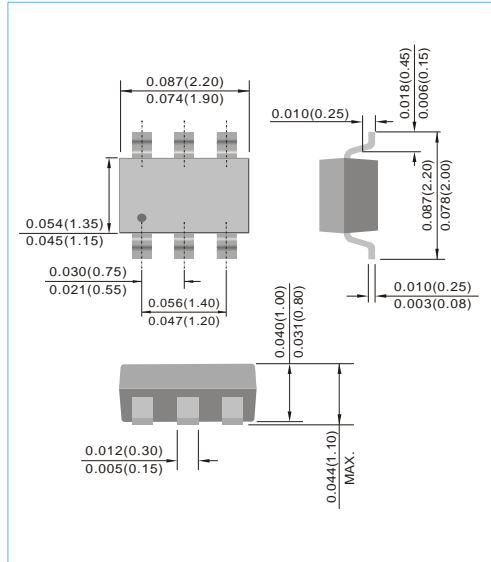

ABSOLUTE RATINGS (each diode)


| Parameter | Symbol | BAT54TW | BAT54ADW | BAT54CDW | BAT54SDW | BAT54DW | Units |
|----------------------------|-----------|---------|----------|----------|----------|---------|-------|
| Marking Code | - | L4 | L42 | L43 | L44 | L41 | - |
| Maximum Reverse Voltage | V_R | 30 | | | | | V |
| Peak Reverse Voltage | V_{RRM} | 30 | | | | | V |
| Continuous Forward Current | I_F | 0.2 | | | | | A |
| Circuit Figure | - | Fig 50 | Fig 46 | Fig 47 | Fig 45 | Fig 107 | - |

THERMAL CHARACTERISTICS

| Parameter | Symbol | Value | Units |
|--|-----------------|------------|---------------|
| Power Dissipation (Note 1) | P_{TOT} | 225 | mW |
| Thermal Resistance, Junction to Ambient (Note 1) | $R_{\theta JA}$ | 550 | $^{\circ}C/W$ |
| Thermal Resistance, Junction to Lead | $R_{\theta JL}$ | 220 | $^{\circ}C/W$ |
| Junction Temperature | T_J | -55 to 125 | $^{\circ}C$ |
| Storage Temperature | T_{STG} | -55 to 150 | $^{\circ}C$ |

NOTE:

- FR-4 Board Minimum pad.

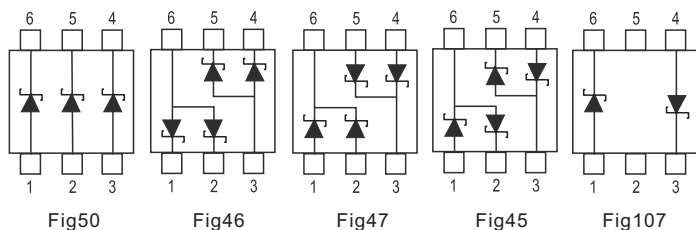



BAT54TW / ADW / CDW / SDW / DW

ELECTRICAL CHARACTERISTICS (each diode) (TA=25°C, unless otherwise noted)

| Parameter | Symbol | Test Condition | MIN. | TYP. | MAX. | Units |
|---------------------------|------------|---|------|------|--------------------------------------|---------|
| Reverse Breakdown Voltage | $V_{(BR)}$ | $I_R=100 \mu A$ | 30 | | | V |
| Reverse Current | I_R | $V_R=25 V$ | | | 2.0 | μA |
| Forward Voltage | V_F | $I_F=0.1mA$ $I_F=1.0mA$ $I_F=10mA$ $I_F=30mA$ $I_F=100mA$ | | | 0.24 0.32 0.40 0.50 1.00 | V |
| Total Capacitance | C_T | $V_R=1V, f=1.0MHz$ | | | 10 | pF |

ELECTRICAL CHARACTERISTICS CURVES

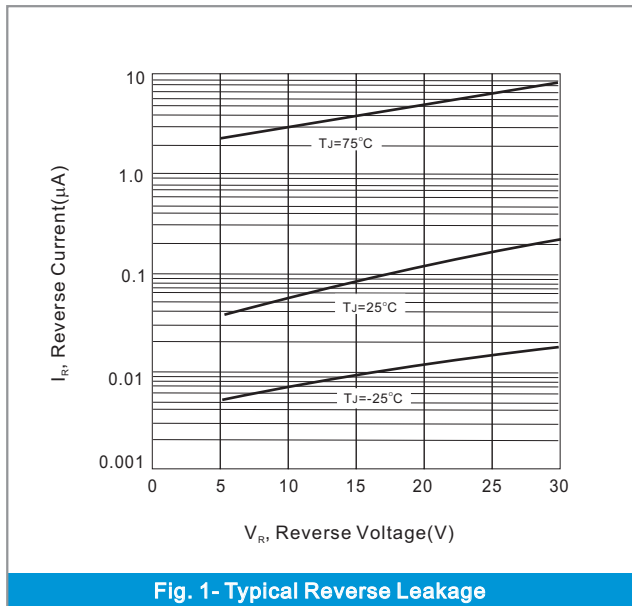


Fig. 1- Typical Reverse Leakage

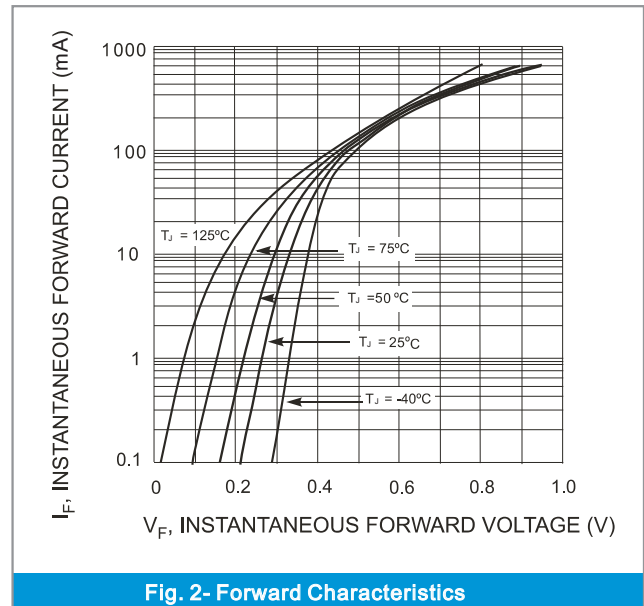


Fig. 2- Forward Characteristics


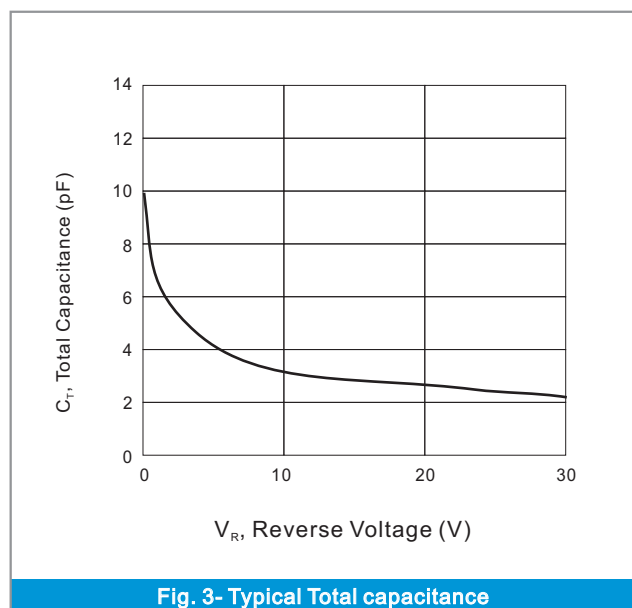


Fig. 3- Typical Total capacitance



BAT54TW / ADW / CDW / SDW / DW

MOUNTING PAD LAYOUT

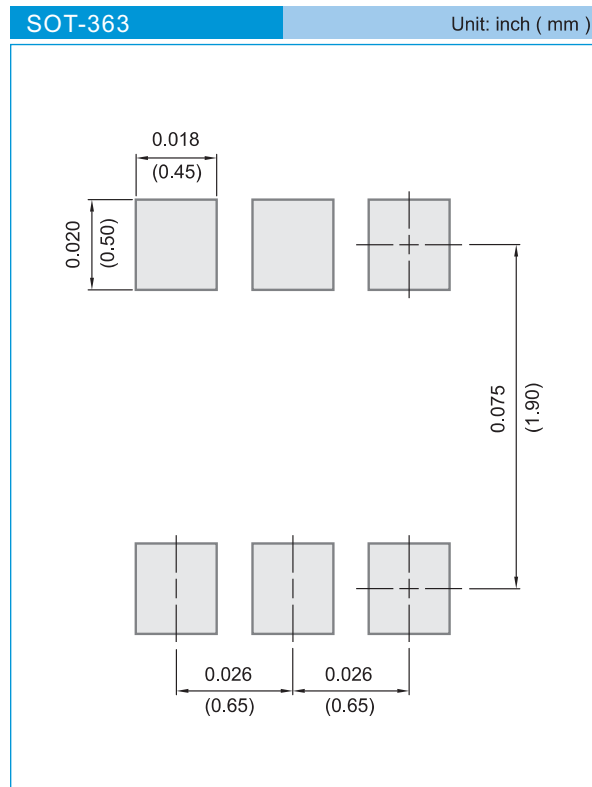

ORDER INFORMATION

- Packing information
 - T/R - 10K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2011

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.