



# BC817 SERIES

## NPN GENERAL PURPOSE TRANSISTORS


<b>VOLTAGE</b>	<b>45 Volts</b>	<b>POWER</b>	<b>330 mW</b>
----------------	-----------------	--------------	---------------

### FEATURES


- General purpose amplifier applications
- NPN epitaxial silicon, planar design
- Collector current  $I_C = 500\text{mA}$
- Lead free in comply with EU RoHS 2002/95/EC directives.
- Green molding compound as per IEC61249 Std. . (Halogen Free)

### MECHANICAL DATA

- Case: SOT-23, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0003 ounces, 0.0084 grams
- Device Marking : BC817-16 : 8A  
BC817-25 : 8B  
BC817-40 : 8C



**SOT-23** Unit : inch(mm)

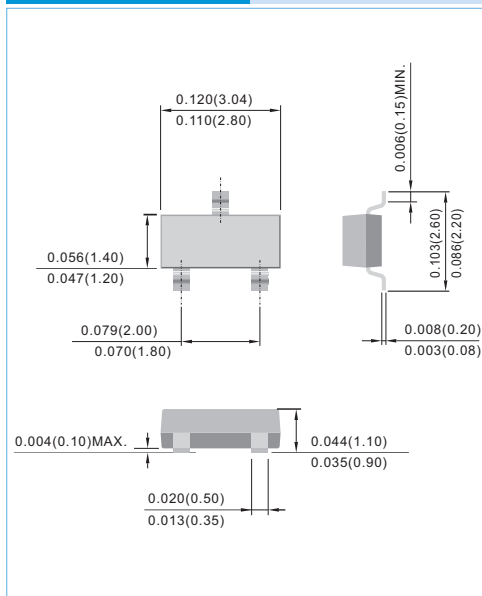

### MAXIMUM RATINGS

PARAMETER	SYMBOL	Value	UNIT
Collector-Emitter Voltage	$V_{CEO}$	45	V
Collector-Base Voltage	$V_{CBO}$	50	V
Emitter-Base Voltage	$V_{EBO}$	5.0	V
Collector Current - Continuous	$I_C$	500	mA
Total Power Dissipation ( NOTE )	$P_{TOT}$	330	mW
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150	°C

### THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	Value	UNIT
Thermal Resistance Junction to Ambient ( NOTE )	$R_{\theta JA}$	375	°C / W
Thermal Resistance Junction to Lead	$R_{\theta JL}$	220	°C / W

NOTE : Transistor mounted on FR-5 board minimum pad mounting conditions.



# BC817 SERIES

## ELECTRICAL CHARACTERISTICS ( $T_J=25^{\circ}\text{C}$ , unless otherwise notes )

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Collector-Emitter Breakdown Voltage ( $I_C=10\text{mA}$ , $I_B=0$ )	$V_{(BR)CEO}$	45	-	-	V
Collector-Base Breakdown Voltage ( $V_{EB}=0\text{V}$ , $I_C=10\mu\text{A}$ )	$V_{(BR)CBO}$	50	-	-	V
Emitter-Base Breakdown Voltage ( $I_E=1\mu\text{A}$ , $I_C=0$ )	$V_{(BR)EBO}$	5.0	-	-	V
Emitter-Base Cutoff Current ( $V_{EB}=5\text{V}$ )	$I_{EBO}$	-	-	100	nA
Collector-Base Cutoff Current ( $V_{CB}=20\text{V}$ , $I_E=0$ )	$I_{CBO}$	-	-	100	nA
				5.0	$\mu\text{A}$
DC Current Gain ( $I_C=100\text{mA}$ , $V_{CE}=1\text{V}$ )	$h_{FE}$	100	-	250	-
		160	-	400	
		250	-	600	
DC Current Gain ( $I_C=500\text{mA}$ , $V_{CE}=1\text{V}$ )		40	-	-	
Collector-Emitter Saturation Voltage ( $I_C=500\text{mA}$ , $I_B=50\text{mA}$ )	$V_{CE(SAT)}$	-	-	0.7	V
Base-Emitter Voltage ( $I_C=500\text{mA}$ , $V_{CE}=1.0\text{V}$ )	$V_{BE(ON)}$	-	-	1.2	V
Collector-Base Capacitance ( $V_{CB}=10\text{V}$ , $I_E=0$ , $f=1\text{MHz}$ )	$C_{CBO}$	-	7.0	-	pF
Current Gain-Bandwidth Product ( $I_C=10\text{mA}$ , $V_{CE}=5\text{V}$ , $f=100\text{MHz}$ )	$f_T$	100	-	-	MHz

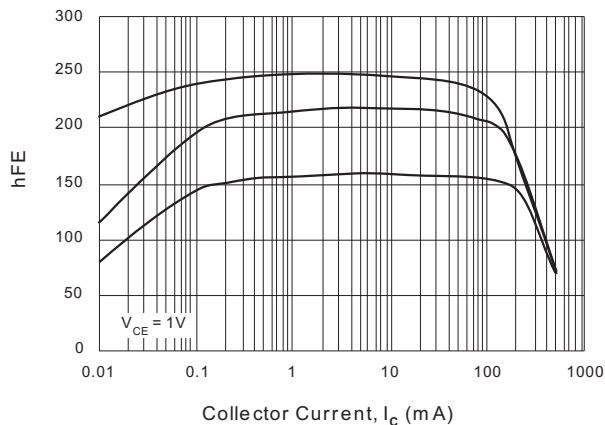


Fig.1 BC817-16 Typical  $h_{FE}$  vs.  $I_C$

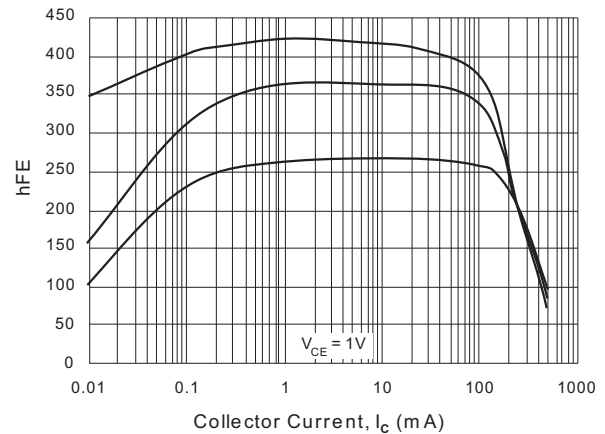


Fig.2 BC817-25 Typical  $h_{FE}$  vs.  $I_C$

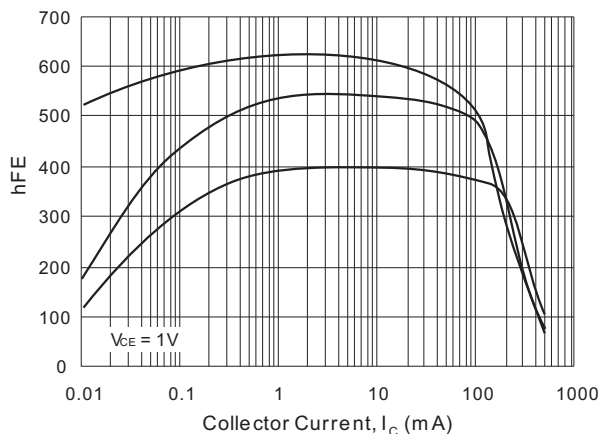


Fig.3 BC817-40 Typical  $h_{FE}$  vs.  $I_C$


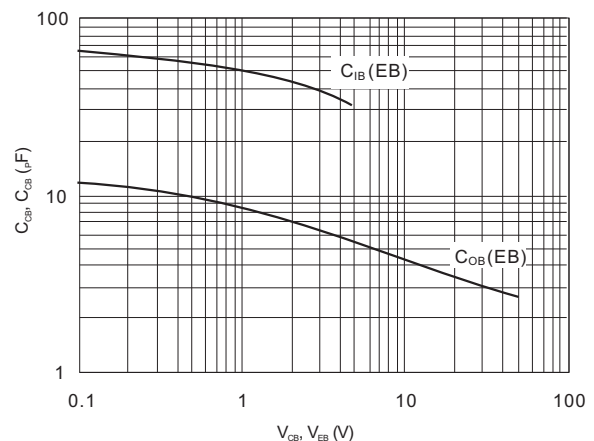


Fig.4 Typical Capacitances



# BC817 SERIES

## MOUNTING PAD LAYOUT

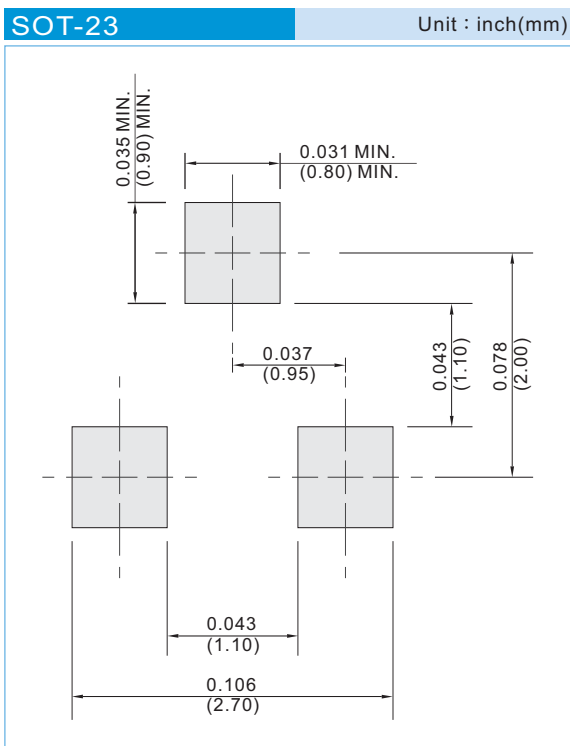

## ORDER INFORMATION

- Packing information
  - T/R - 12K per 13" plastic Reel
  - T/R - 3K per 7" plastic Reel

## LEGAL STATEMENT

### Copyright PanJit International, Inc 2012

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.