



# 1SS355

## SURFACE MOUNT SWITCHING DIODE

**VOLTAGE** 90 Volts **POWER** 200 mW

**SOD-323** Unit : inch(mm)

### FEATURES

- Small surface mounting type (SOD-323)
- High Speed ( $T_{RR}=1.2ns$  Typ)
- High reliability with surge current handling capability
- Lead free in comply with EU RoHS 2002/95/EC directives.
- Green molding compound as per IEC61249 Std. . (Halogen Free)

### MECHANICAL D5H5

Case: SOD-323 plastic



Terminals : Solderable per MIL-STD-750,Method 2026

Polarity : Color band cathode

Approx Weight: 0.00014 ounces, 0.0041 grams

Silicon epitaxial planar

Marking: 355

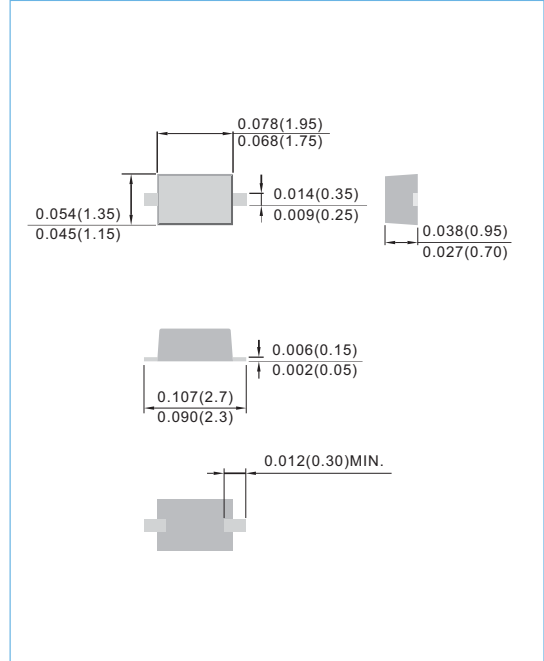

### MAXIMUM RATINGS

PARAMETER	SYMBOL	LIMITS	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RM}$	90	V
Maximum DC Reverse Voltage	$V_R$	80	V
Maximum Peak Forward Current	$I_{FM}$	225	mA
Mean Rectifying Current	$I_O$	100	mA
Surge Current $t_p=1000ms(1sec)$	$I_{FSM}$	0.5	A
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to + 150	°C

### ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS	CONDITONS
Forward Voltage	$V_F$	--	--	1.2	V	$I_F=100mA$
Reverse Current	$I_R$	--	--	0.1	$\mu A$	$V_R=80V$
Capacitance Between Terminals	$C_T$	--	--	3.0	pF	$V_R=0V, f=1MHz$
Reverse Recovery Time	$T_{RR}$	--	--	4.0	ns	$V_R=6V, I_F=10mA, R_L=100\Omega$

Note : 1.Mounted on min pad conditions using FR-4 PCB



# 1SS355

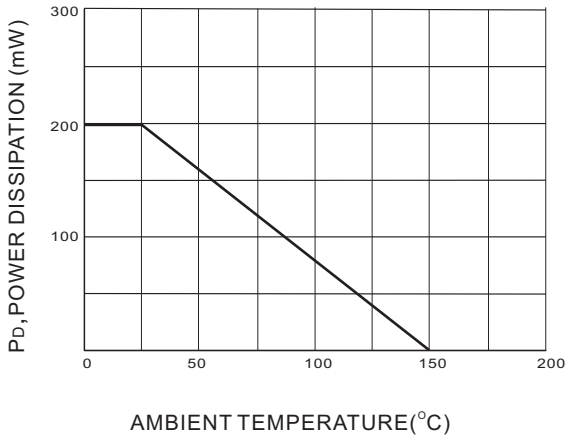


FIG. 1 POWER DERATING CURVE

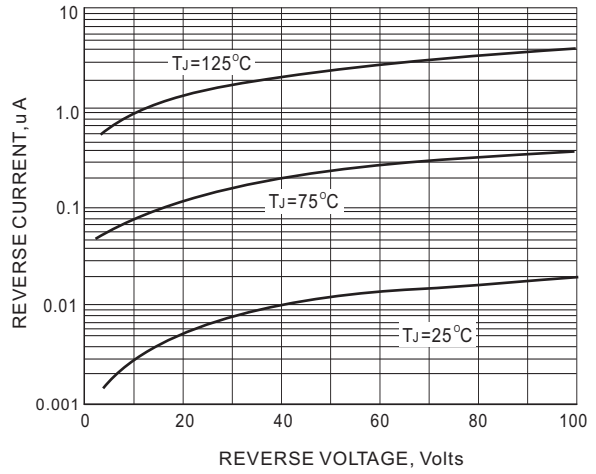


FIG. 2-TYPICAL REVERSE CHARACTERISTICS

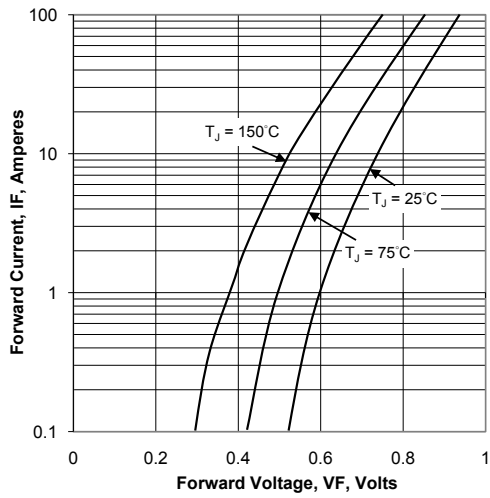


FIG. 3 TYPICAL FORWARD CHARACTERISTIC


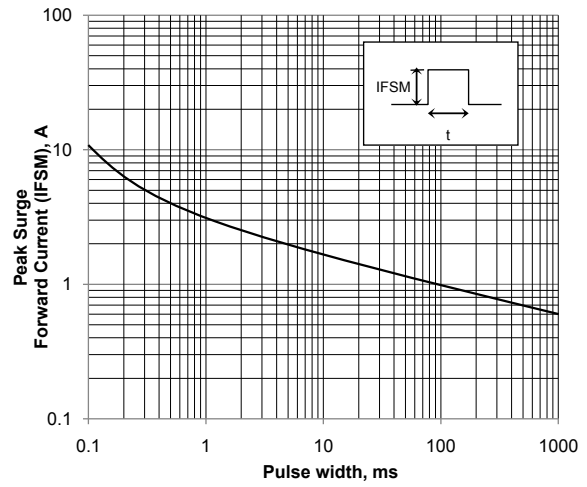


FIG.4-SURGE CURRENT



# 1SS355

## MOUNTING PAD LAYOUT

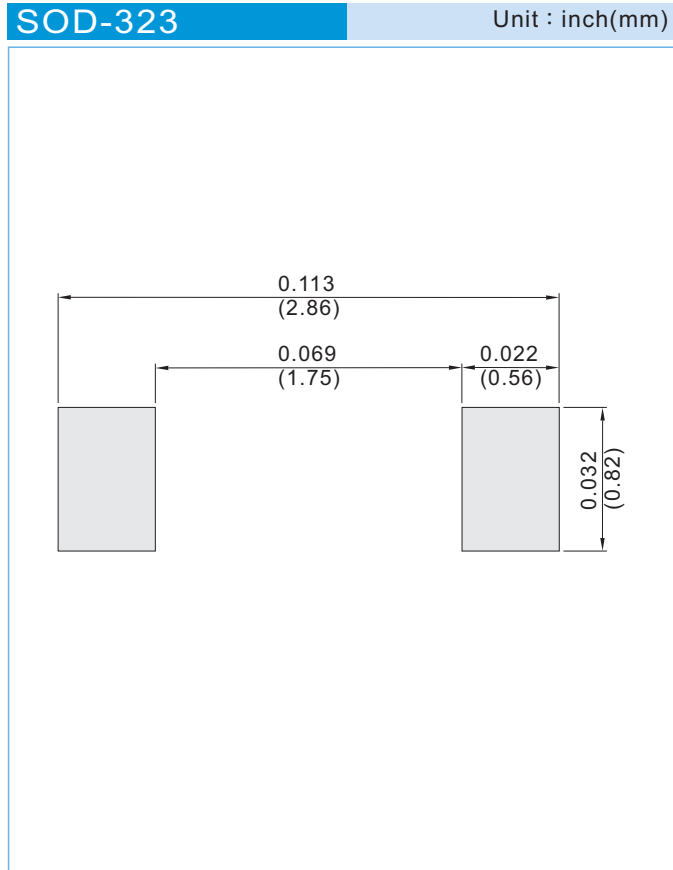

### ORDER INFORMATION

- Packing information  
T/R - 12K per 13" plastic Reel  
T/R - 5K per 7" plastic Reel

### LEGAL STATEMENT

#### Copyright PanJit International, Inc 2012

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.




# 1SS355

**Part No\_packing code\_Version**

For example :

**RB500V-40\_R2\_0000%**

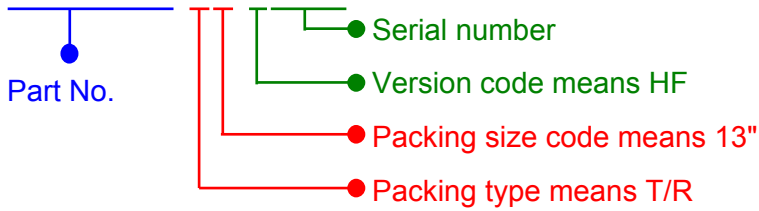

Packing Code <b>XX</b>				Version Code <b>XXXXX</b>		
Packing type	<b>1<sup>st</sup> Code</b>	Packing size code	<b>2<sup>nd</sup> Code</b>	HF or RoHS	<b>1<sup>st</sup> Code</b>	<b>2<sup>nd</sup>~5<sup>th</sup> Code</b>
T/B	<b>A</b>	N/A	<b>0</b>	HF	<b>0</b>	<b>serial number</b>
T/R	<b>R</b>	7"	<b>1</b>	RoHS	<b>1</b>	<b>serial number</b>
B/P	<b>B</b>	13"	<b>2</b>			
T/P	<b>T</b>	26mm	<b>X</b>			
TRR	<b>S</b>	52mm	<b>Y</b>			
TRL	<b>L</b>	PBCU	<b>U</b>			
FORMING	<b>F</b>	PBCD	<b>D</b>			