


SK5214

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
11-20-03	NC	ECO 21711		ME	

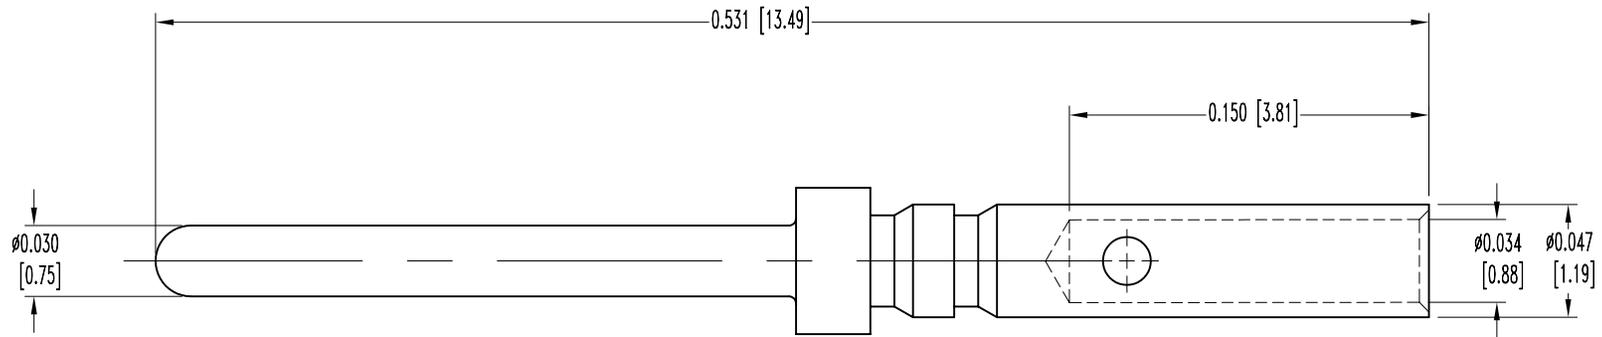

- NOTES:
 MATERIAL AND FINISHES:
 1. CONTACT: BRASS WITH GOLD FLASH OVER NICKEL.
 2. ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING: 5 AMPS NOMINAL.
 INITIAL CONTACT RESISTANCE: 0.005 OHMS MAX.
 3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com		SCALE		DRAWN BY	
		N.T.S.		M. ENEA	
 DECIMAL TOL. ± 0.015 [0.38]		DD SERIES		APPROVED BY	
		TITLE			
		MC8022D			
 ANGULAR TOL. $\pm 5^\circ$		DATE	DRAWING NUMBER	REV.	
		11-20-03	SK5214	NC	