
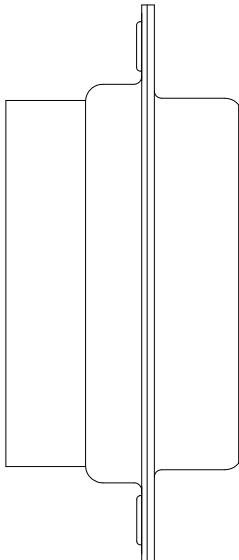
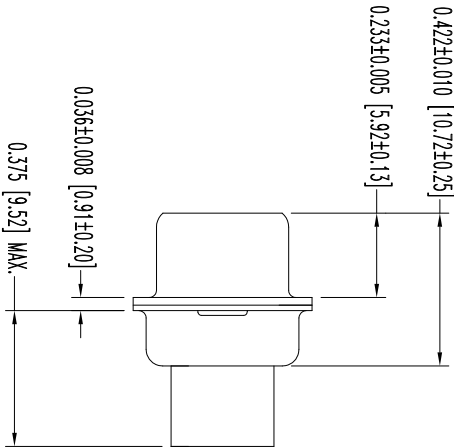


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE USER SHALL BE RESPONSIBLE FOR THE PROPER USE OF THE USER SHALL ASSUME ALL RESPONSIBILITY FOR THE RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
10-25	NC	ECO 34633	COLF	LO	COLF
6-11	A	ECO 39759	COLF	BE	COLF
13					

SK12775

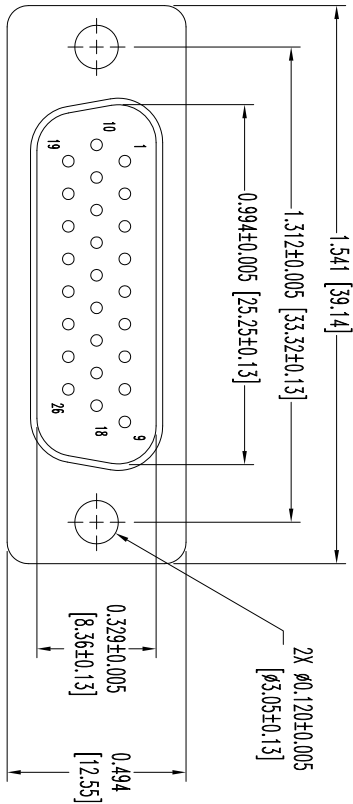

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, COLOR BLUE.

SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

2. DETAILED PRODUCT, MECHANICAL AND ELECTRICAL INFORMATION IS AVAILABLE IN THE

LATEST HIGH DENSITY D-SUB PRODUCT PUBLICATION. VISIT

CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITY-SUBMINATURE OR CONNECTPOSITRONIC.COM


3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC
INDUSTRIES INC.
www.connectpositronic.com

FSCM 28198



DECIMAL TOL.
± 0.015 [0.38]

DD SERIES

SCALE
N.T.S.

DRAWN BY
L. OMENS

APPROVED BY
COLF

DD26M00000/AA

ANGULAR TOL.
± 5°

DATE
10-25-11

DRAWING NUMBER
SK12775

REV.
A