


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER ASSUMES ALL LIABILITY FOR ANY INADEQUACIES AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

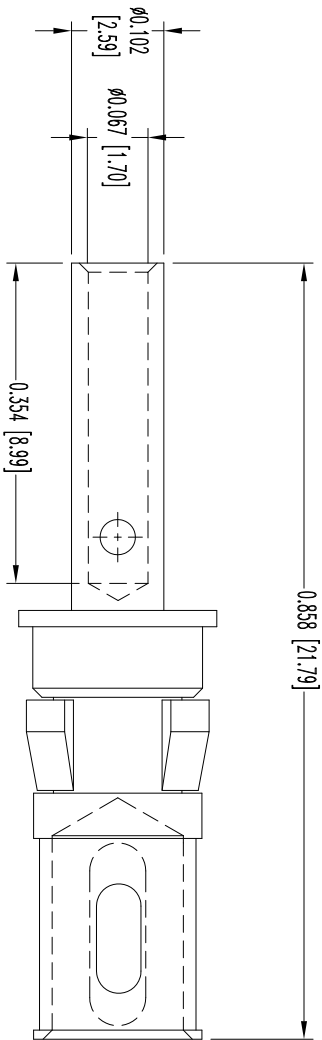

NOTES:

1. MATERIAL AND FINISH:
CONTACT: HIGH CONDUCTIVITY COPPER ALLOY, GOLD FLASH OVER NICKEL.
SPRING CLIP: BERYLLIUM COPPER, GOLD FLASH OVER 0.000030 [0.76µ] NICKEL OVER COPPER.
RETENTION RING: POLYETHERIMIDE, COLOR BLACK.
2. ELECTRICAL CHARACTERISTICS:
CONTACT CURRENT RATING: 10 AMPERES NOMINAL.
INITIAL CONTACT RESISTANCE: 0.005 OHMS MAXIMUM.
PROOF VOLTAGE: 1,000 V r.m.s.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION RECORD	APP	DR	OK
8-12-03	NC	ECO 21272	RCW	ME	TK
9-13-16	A	ECO 52574	COLF	CM	COLF

SK5101

					
POSITRONIC INDUSTRIES INC.					
www.connectpositronic.com					
FSCM 28198					
TITLE		SCALE		DRAWN BY	
CBD SERIES		N.T.S.		M.BNEA	
DECIMAL TOL.		APPROVED BY		RCW	
± 0.015 [0.38]					
ANGULAR TOL.		DATE		DRAWING NUMBER	
± 5°		8-12-03		SK5101	
				REV.	
				A	