
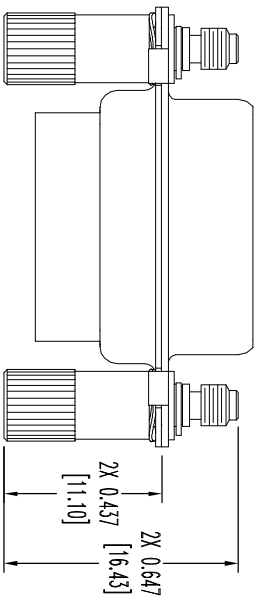
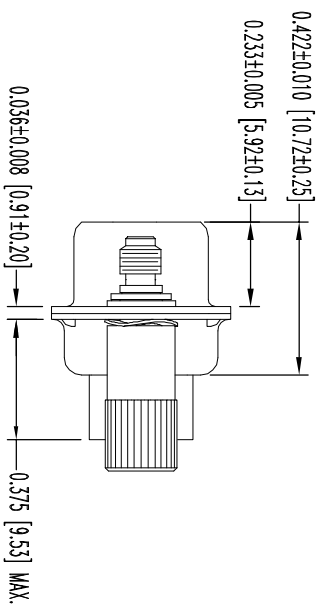


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSTTRONIC, INC. ANY REPRODUCTION OR UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED, EXCEPT AS POSTTRONIC, INC. MAY OTHERWISE AGREE IN WRITING.

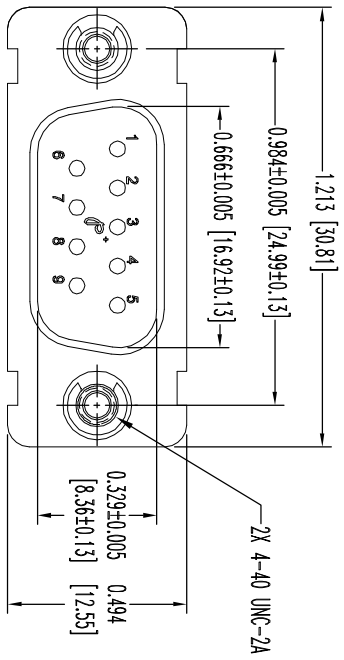

NOTES:

1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED DAP PER ASTM-D-5948, SOG-F, UL 94V-0, GREEN COLOR.
SHELLS: STAINLESS STEEL, PASSIVATED.
JACKSCREWS, WASHERS, C-CLIPS: STAINLESS STEEL, PASSIVATED.
2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY D-SUB PRODUCT PUBLICATION AT CONNECTPOSTTRONIC.COM.
3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION RECORD	APP	DR	CK
11-28-15	NC	ECO 48910	COLF	AP	CV

SK18206



POSTTRONIC INDUSTRIES INC.
SPRINGFIELD, MISSOURI 65801

DECIMAL TOL. ± 0.015 [0.38]	ANGULAR TOL. ± 5°	DATE 11-26-15	DRAWING NUMBER SK18206	REV. NC
TITLE RD SERIES		SCALE N.T.S.	DRAWN BY AP	
RD9M000E3S/AA		APPROVED BY COLF		