
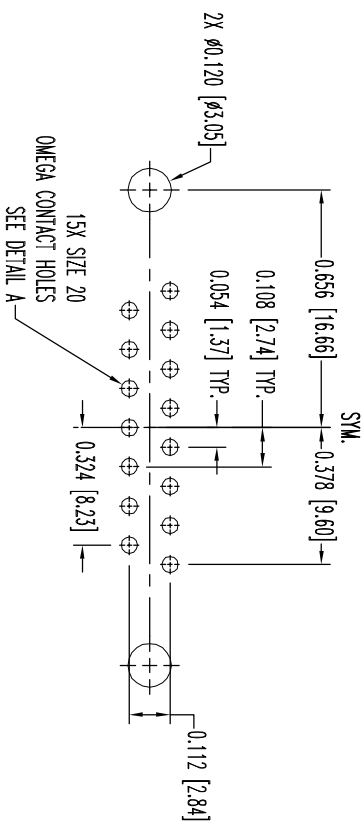
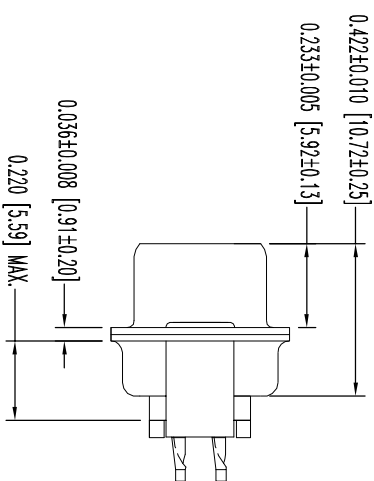
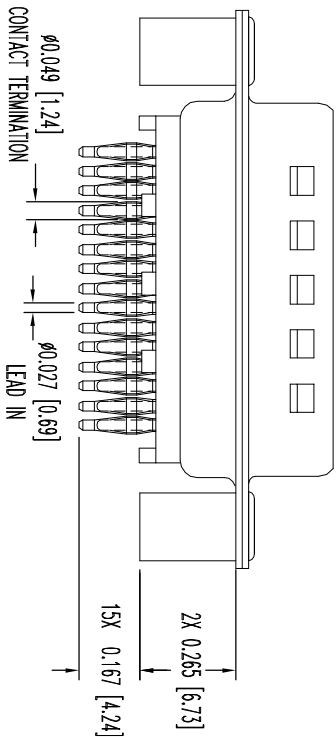


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER ASSUMES ALL RESPONSIBILITY FOR THE PROPER USE AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

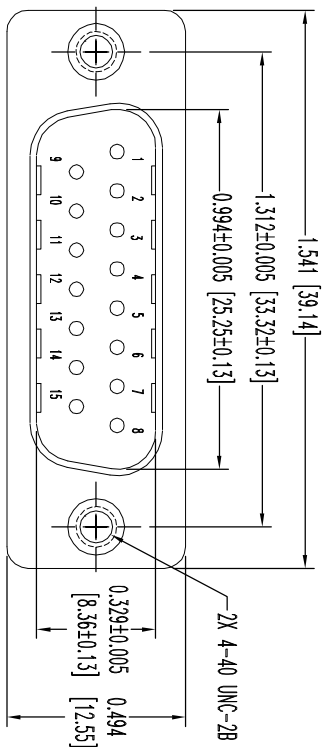

CONTACT HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER PER ASTM-D5927, UL 94V-0, COLOR: BLUE.

CONTACTS: PRECISION MACHINED COPPER ALLOY, 0.000030 [0.76µ] GOLD OVER NICKEL PLATE.

SHEETS: STEEL, TIN PLATED AND DIMPLED.


MOUNTING SPACERS: STEEL, TIN PLATED.

2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST COMPLIANT D-SUB PRODUCT PUBLICATION. VISIT

CONNECTPOSITRONIC.COM/PRODUCTS/60/COMPLIANTPRESS-FIT OR CONNECTPOSITRONIC.COM.


3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

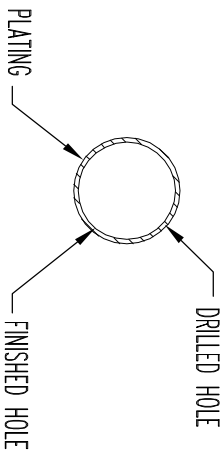

POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

FSCM 28198



DECIMAL TOL.
± 0.015 [0.38]

PCD SERIES

SCALE
N.T.S.

DRAWN BY
M. POP

APPROVED BY
COLE

TITLE

PCD15M98S00Z/AA-14

DATE

3-4-15

DRAWING NUMBER

SK17127

REV.

NC

DATE	REV	REVISION RECORD	APP	DR	CK
3-4	NC	ECO 46091	COLE	MP	COLE

SK17127