


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE INFORMATION IS GIVEN FOR CONSIDERATION BY THE USER, POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
8-22-04	B	ECO 23033	TK	YK	COLF
9-13-16	C	ECO 52574	COLF	CM	COLF

SK2415

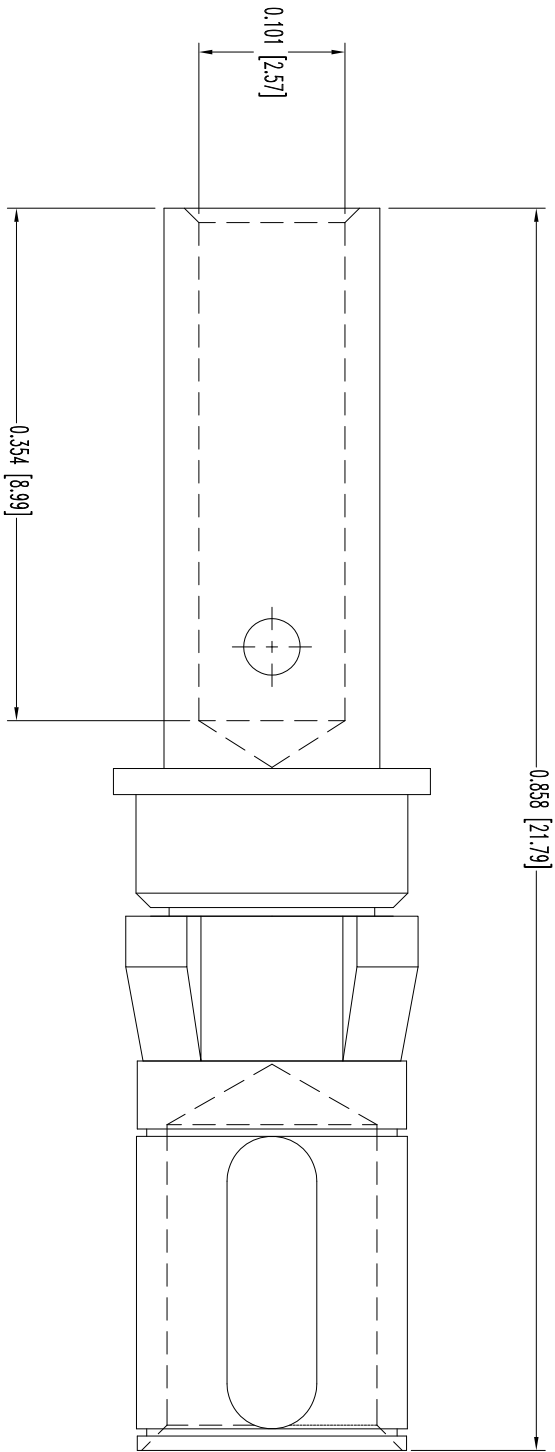

NOTES:

1. MATERIAL AND FINISHES:

CONTACT: COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.

RETENTION RING: POLYETHERIMIDE, COLOR BLACK.

2. ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 20 AMPERES.

INITIAL CONTACT RESISTANCE: 0.008 OHMS MAXIMUM.


3. TEMPERATURE RANGE: -55°C TO +125°C.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

FSCM 28198



DECIMAL TOL.
± 0.015 [0.38]

CBD SERIES

SCALE
N.T.S.

DRAWN BY
YK

APPROVED BY
TK

FC4012D

ANGULAR TOL.
± 5°

DATE
9-22-04

DRAWING NUMBER
SK2415

REV.
C