
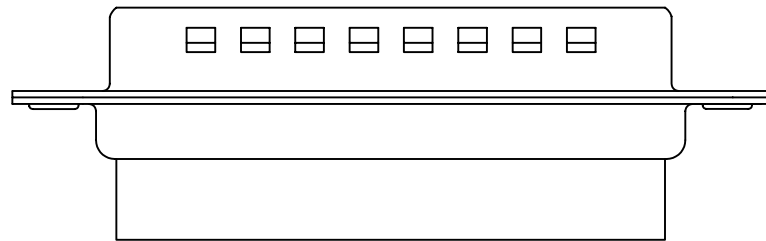
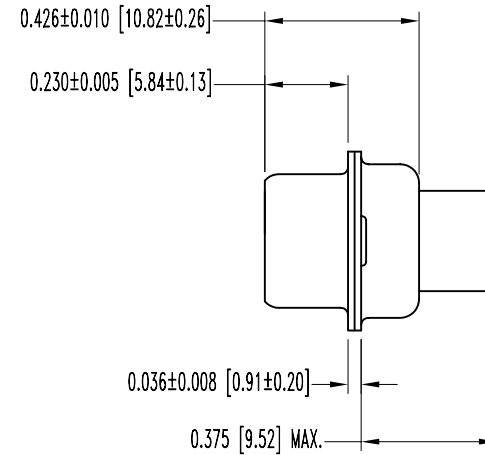


SK5793

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

| DATE | REV | REVISION RECORD | APP | DR | CK |
|---------|-----|-----------------|-----|----|----|
| 11-3-04 | NC | ECO 23221 | | YK | |
| | | | | | |
| | | | | | |

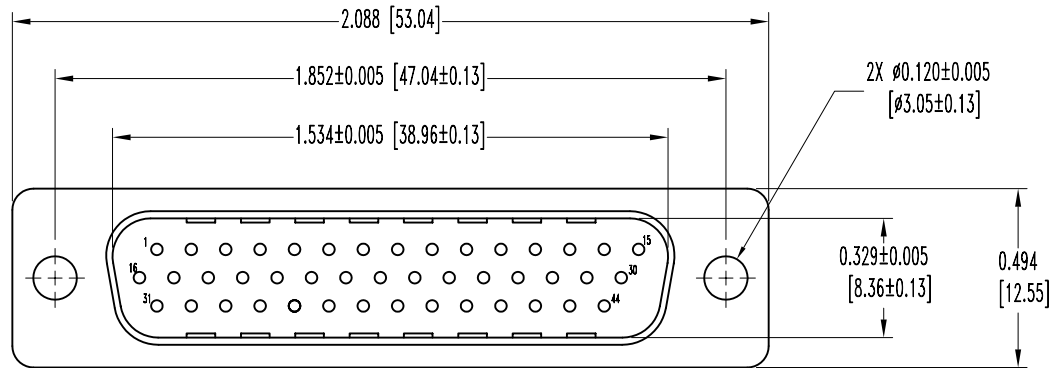

NOTES:

- MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519, UL 94V-0, COLOR BLUE.
SHELLS: STEEL, TIN PLATED AND DIMPLED.
- ELECTRICAL CHARACTERISTICS:
INSULATION RESISTANCE: 5 G OHMS.
WORKING VOLTAGE: 300 V r.m.s.
- TEMPERATURE RANGE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

| | | | |
|---|-----------|----------------|----------|
|  POSITRONIC INDUSTRIES INC. www.connectpositronic.com | | SCALE | DRAWN BY |
| | | N.T.S. | YK |
| DECIMAL TOL. | DD SERIES | APPROVED BY | |
| ± 0.015 [0.38] | TITLE | DD44M0000Z | |
| ANGULAR TOL. | DATE | DRAWING NUMBER | REV. |
| ± 5° | 11-3-04 | SK5793 | NC |